



DUNES

DUNES

- 5 DUNES AURORA
- 10 DUNES DIM OUT
- 14 DUNES PLAIN
- 18 DUNES LINE

Todos nuestros distribuidores trabajan con tejidos, componentes y motores VERTILUX si alguien te ofrece un producto diferente que deseas o un producto que no es VERTILUX repórtalo, la satisfacción de nuestros clientes es primero.

DUNES

PROPIEDADES TÉCNICAS

Composición	100% PES
Peso	
Line	73 g/m ² ± 5% 2.57 oz/yd ² ± 5%
Plain	75 g/m ² ± 5% 2.64 oz/yd ² ± 5%
Dim out	150 g/m ² ± 5% 5.29 oz/yd ² ± 5%
Aurora	75 g/m ² ± 5% 2.64 oz/yd ² ± 5%
Ancho del lienzo	41 cm ± 5% 16.14 in ± 5%
Tipo de acabado	Preteñido
Tipo de hilo	Texturado

Evaluaciones de desempeño realizadas por laboratorios independientes.

CUIDADO Y MANTENIMIENTO



1. Limpie suavemente con una esponja húmeda.
2. Aspirar para un mantenimiento regular.
3. No lavar.
4. No exprimir los lienzos.
5. No usar blanqueadores.
6. No usar secadora de ropa.

CERTIFICACIONES INTERNACIONALES

La Colección Vertilux tiene todos los certificados más importantes de la industria. Sin embargo, se aplican diferentes certificados para diferentes tejidos de nuestra colección. Consulte a nuestro Departamento de Servicio al Cliente sobre los certificados disponibles para patrones de tela específicos.



TEJIDO LIGERO

Dunes está fabricada con materiales de alta calidad que dan como resultado un tejido suave y ligero que aporta una textura agradable y aporta cuerpo a la persiana.



CIRCULACIÓN DE AIRE

Dunes está confeccionada en lienzos de tejido individuales, haciendo que circule el aire a través de la persiana, incluso cuando se encuentre cerrada, favoreciendo así la ventilación.



FÁCIL APERTURA

Las persianas Dunes son muy sencillas de usar, pues basta con accionar la cadena, el bastón o el control remoto para cerrar y mantener la privacidad, o abrir para dejar que la luz entre en su espacio.



MÁS INFORMACIÓN

Consulta más información en nuestro micrositio Dunes, sólo escanea el código QR o ingresa a: vertilux.mx/consideraciones-dunes

IMPORTANTE: Los valores y recomendaciones de esta tarjeta no son contractuales y no pueden utilizarse como reclamación para cancelaciones o devoluciones de pedidos. Estos datos técnicos pueden variar con el tiempo sin previo aviso. Las muestras de color aquí presentadas pueden no ser exactas al material usado para producir su pedido. No serán aceptadas devoluciones por variación mínima de color o textura.

MANUFACTURA



APLICACIONES




- ✓ Libre de Ftalatos
- ✓ Libre de Formaldehído
- ✓ Libre de Plomo
- ✓ Libre de BPA



DUNES AURORA

LA EVOLUCIÓN DE LAS CORTINAS TRADICIONALES

DUNES AURORA

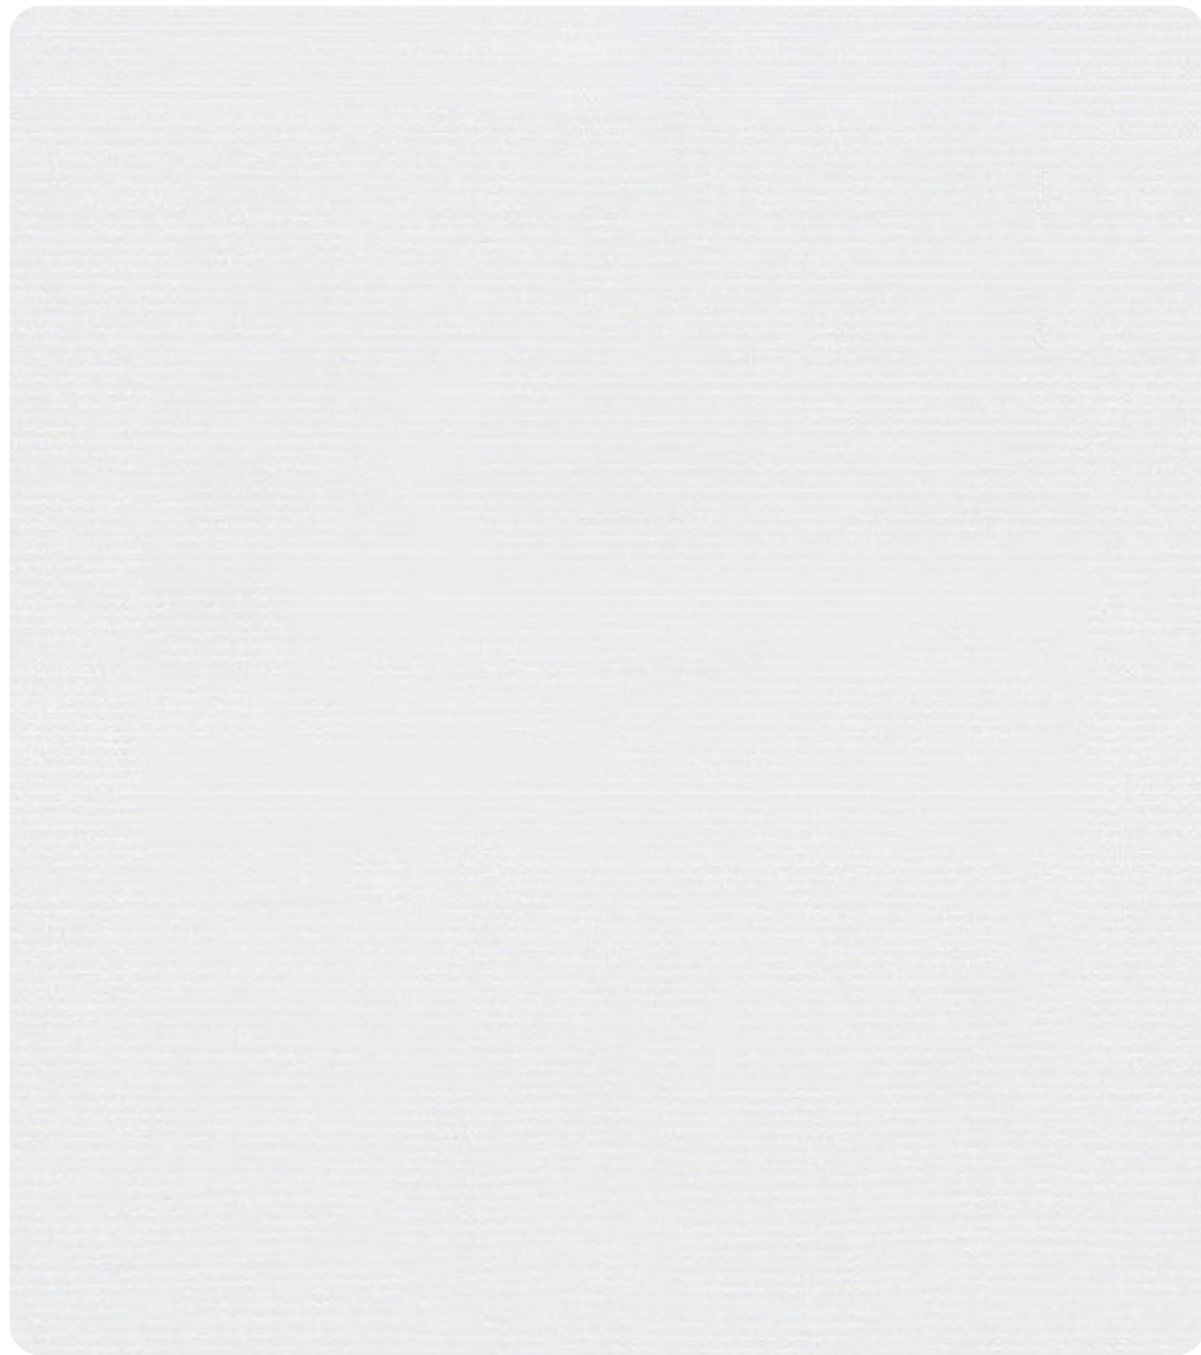

WHITE0-000-98-01000

DUNES AURORA



IVORY0-000-98-02000



BEIGE0-000-98-03000



BISCUITO-000-98-04000



SMOKE 0-000-98-07000

DUNES AURORA



TECHNICAL PROPERTIES

Composition	100% PES
Weight	150 g/m2 ± 3% 4.42 oz/yd² ± 3%
Thickness	Solid: 0.38 mm ± 2% 0.015 in ± 2% Sheer: 0.20 mm ± 2% 0.007 in ± 2%
Roll Width	40 cm 15.75 in
Roll Length	100 m ± 5% 109 yd ± 5%
Tensile Strength*	35.8 daN/5cm
Tearing Strength*	1.7 daN
Light Fastness*	>6

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Do not vacuum.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

M A NUFAC TURING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

APPLICATIONS



INICIO

DUNES




-INICIO



DUNES DIM OUT

LA EVOLUCIÓN DE LAS CORTINAS TRADICIONALES


DUNES DIM OUT

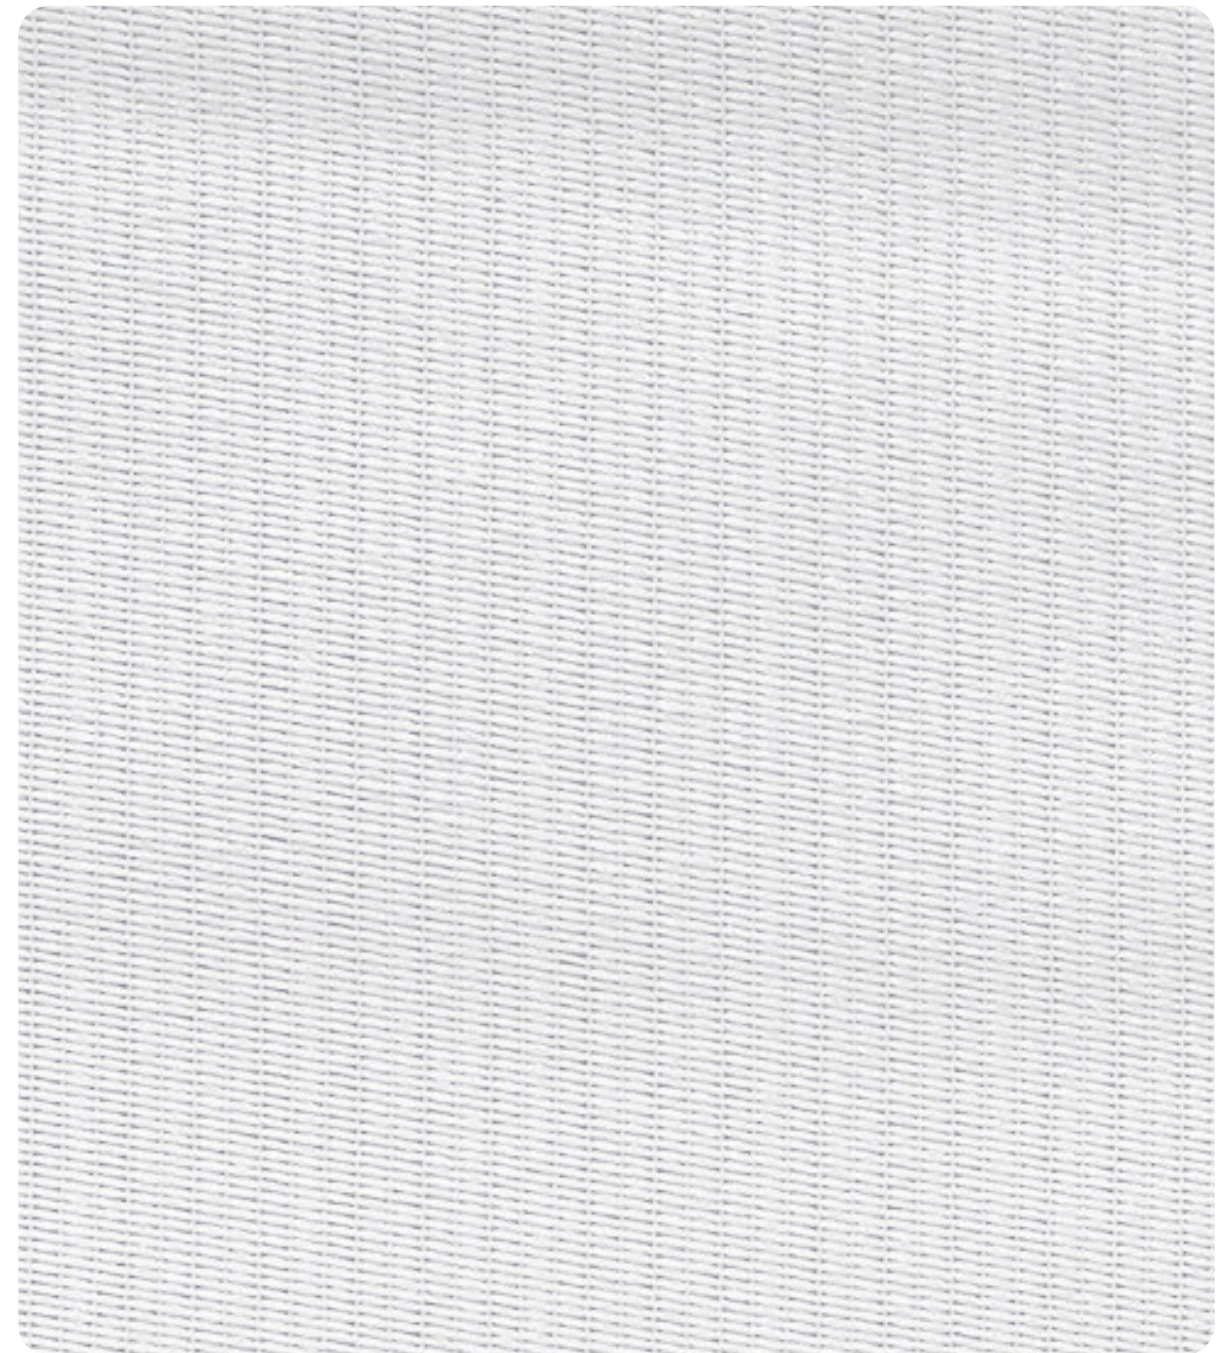

WHITE0-000-96-10100

-INICIO

DUNES DIM OUT

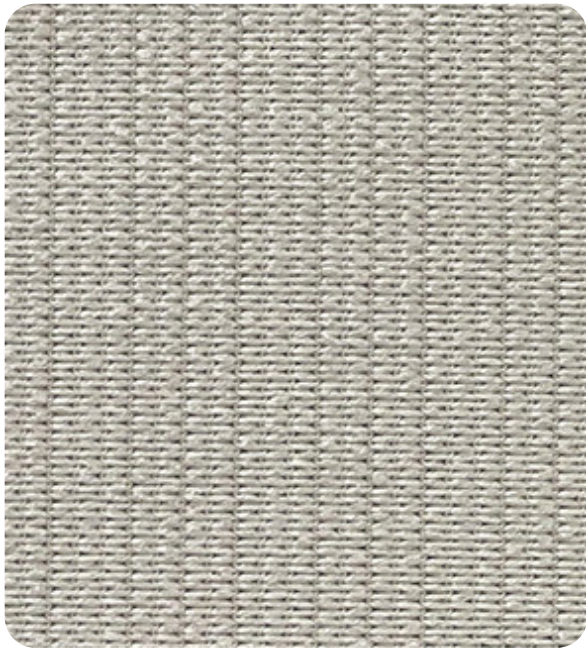

BEIGE 0-000-96-10300



STONE 0-000-96-10400

EBONY 0-000-96-10500

DUNES
DIM OUT



TECHNICAL PROPERTIES

Composition	100% PES
Weight	150.45 g/m2 ± 5% 4.44 oz/yd2 ± 5%
Thickness	0.8 mm ± 5% 0.031 in ± 5%
Width	0.41 m 16.14 in
Length	50 m 54.68 yd
UV Blockage	100%
Light Fastness (Grey Scale Level)	4.5 Xenotest Grade
Tensile Strength	Opaque: 20 daN/5cm Mesh: 58 daN/5cm

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

M A NUFAC T U R I N G



Use Only on Roll Direction Ultrasonic Cut NOT Required

A P P L I C A T I O N S



Flexilux Shades



Indoor Use Only



-INICIO



DUNES PLAIN

LA EVOLUCIÓN DE LAS CORTINAS TRADICIONALES

DUNES PLAIN



WHITE0-000-95-10100


-INICIO

DUNES PLAIN



IVORY0-000-95-10200

BEIGE0-000-95-10300

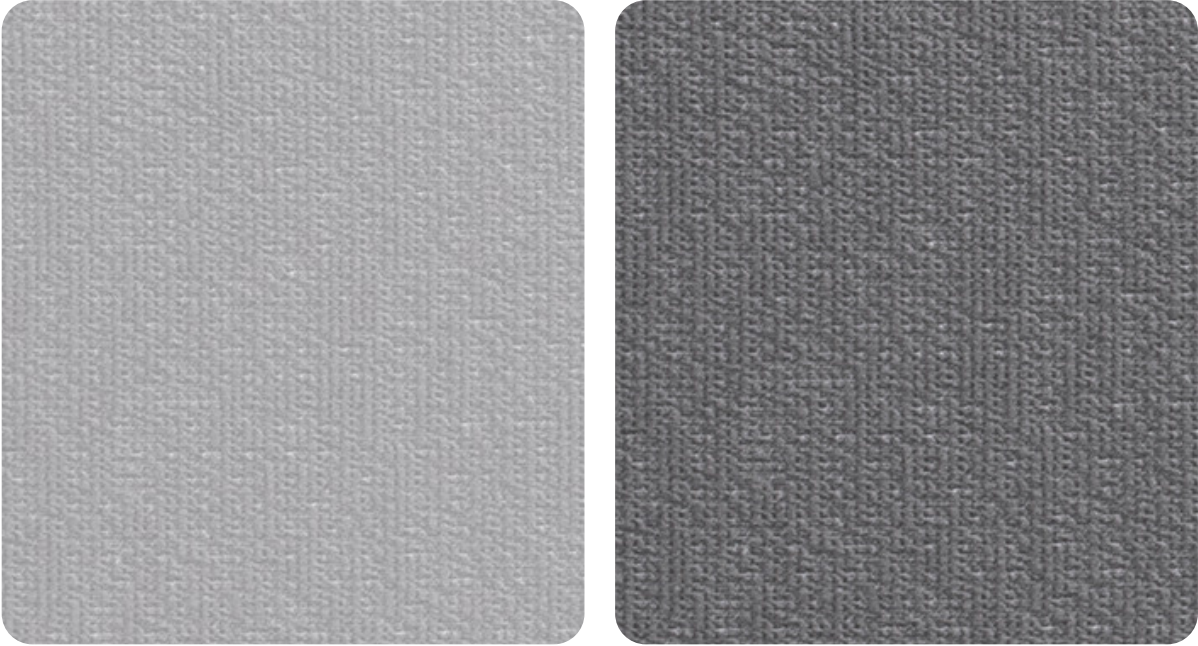

GREY0-000-95-10400

DARK GREY0-000-95-10500

DUNES
PLAIN



TECHNICAL PROPERTIES

Composition	Weight	Thickness
Roll	Width	Roll Length
Fastness		
		100% PES
		75 g/m2 ± 5% 2.21 oz/yd2 ± 5%
		0.8 mm ± 5% 0.031 in ± 5%
		0.41 m 16.14 in
		50 m 54.68 yd
		AATCC 4th Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



- 1. Vacuum clean for regular maintenance.
- 2. Do not wash.
- 3. Do not wring dry.
- 4. Do not bleach.
- 5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

M A NUFAC TURING



Use Only on Roll Direction Ultrasonic Cut NOT Required

APPLICATIONS



Flexilux Shades Indoor Use Only




-INICIO



DUNES LINE

LA EVOLUCIÓN DE LAS CORTINAS TRADICIONALES

DUNES LINE

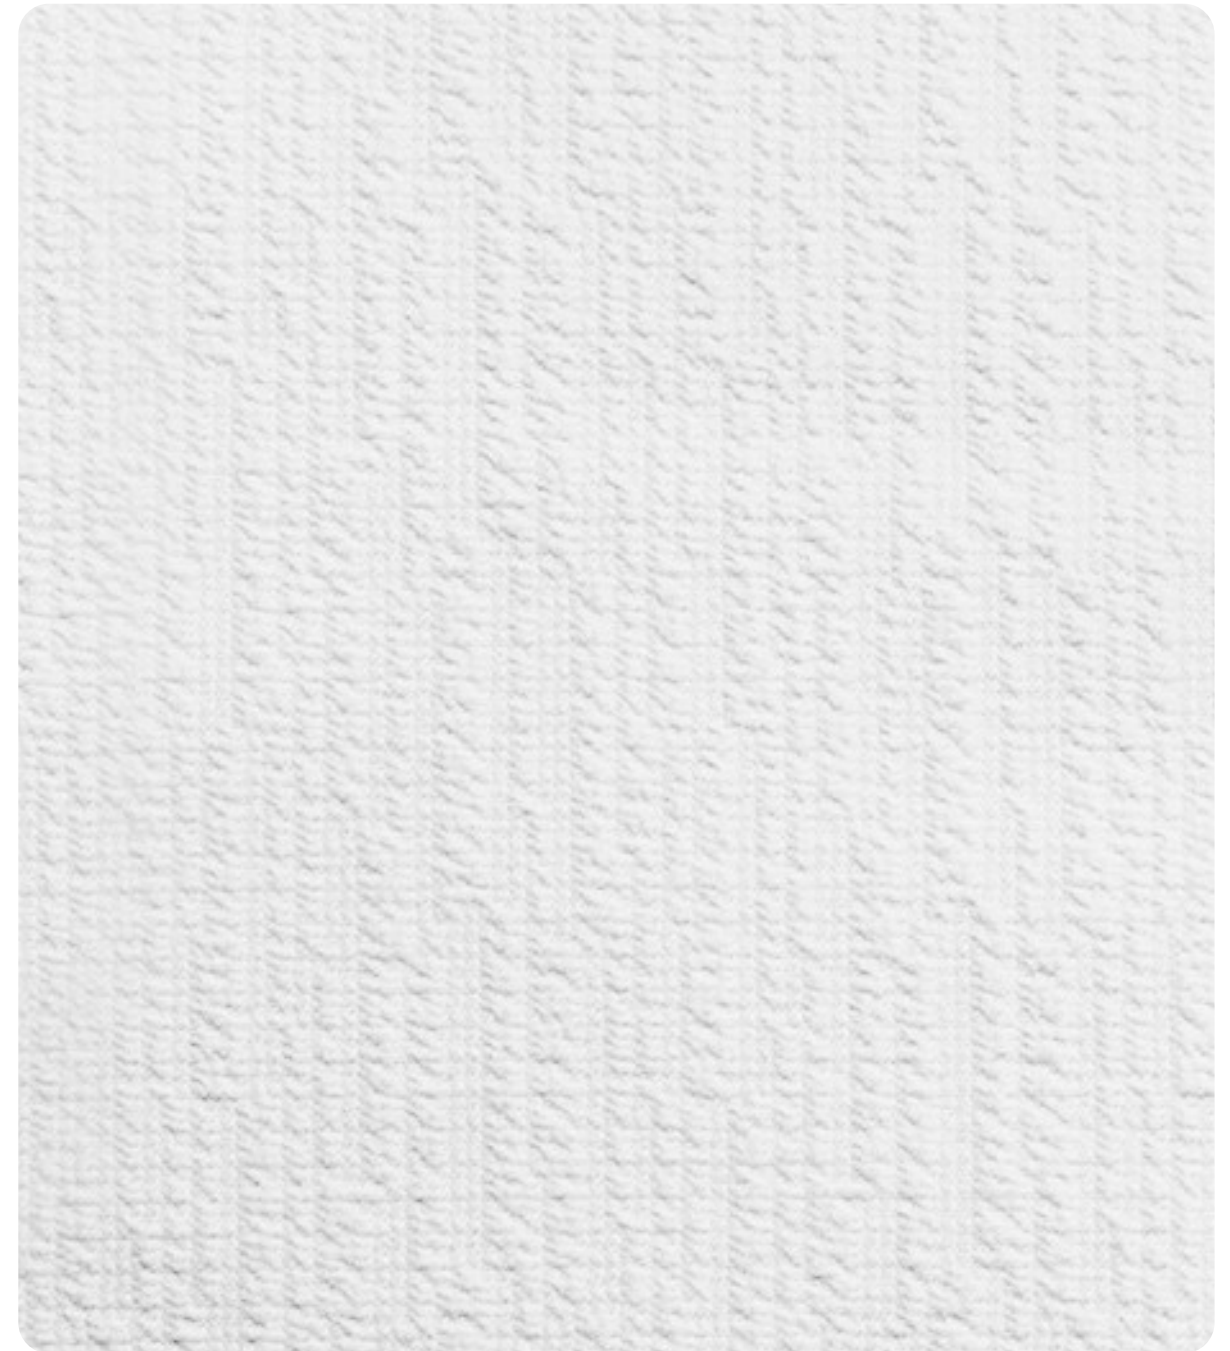

WHITE0-000-97-20100

-INICIO

DUNES LINE



IVORY0-000-97-20200

BEIGE0-000-97-20300

DUNES
LINE



TECHNICAL PROPERTIES

Composition	Weight	Thickness
Roll	Width	Roll Length
Fastness		
		100% PES
		73 g/m2 ± 5% 2.15 oz/yd2 ± 5%
		0.8 mm ± 5% 0.031 in ± 5%
		0.41 m 16.14 in
		50 m 54.68 yd
		AATCC 4th Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



- 1. Vacuum clean for regular maintenance.
- 2. Do not wash.
- 3. Do not wring dry.
- 4. Do not bleach.
- 5. Do not dry clean nor use steam cleaning.

M A NUFAC T U R I N G



Use Only on Roll Direction Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS



Flexilux
Shades



Indoor Use
Only