




ZULDEK
FÁBRICA DE PERSIANAS

DUNE



COFFEE 0-002-E3-00360

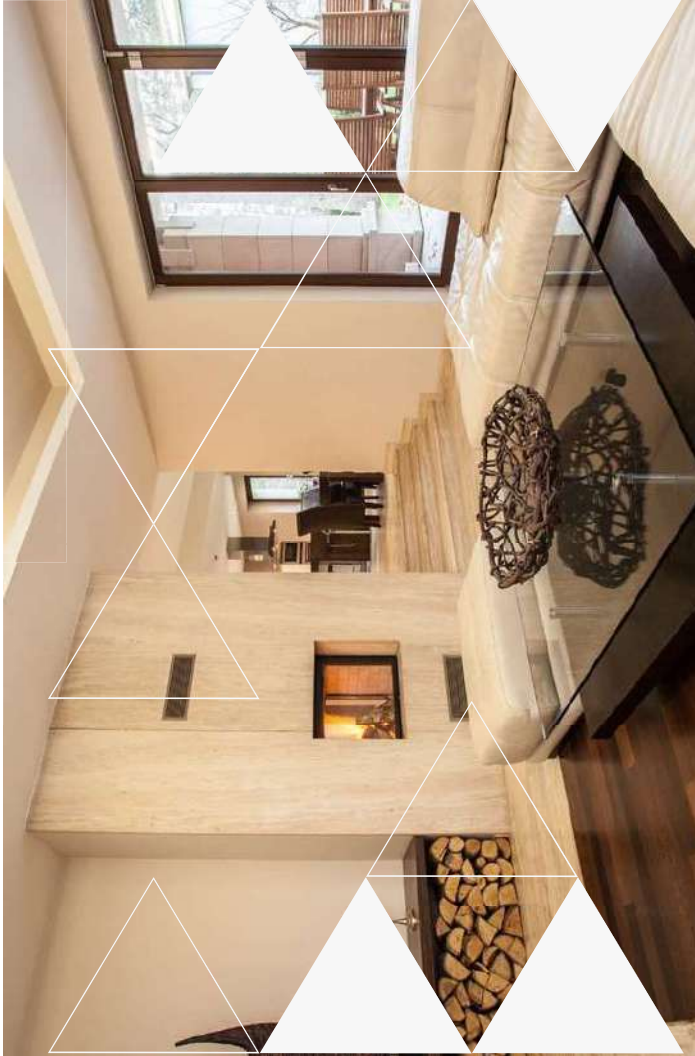

DUNE
DECORATIVE

COLECCIÓN DECORATIVE

DECORATIVE
DUNE



DUNE



CONCRETE 0-002-E3-00460



CRUDO 0-002-E3-00160

PROPIEDADES TÉCNICAS

Composición	63.1% PES + 32.4% PES reciclado + 4.5% Lino
Peso	145 g/m² ± 5% 5.11 oz/yd² ± 5%
Grosor	0.39 mm ± 5% 0.015 in ± 5%
Ancho de rollo	2.7 m 106 in
Largo de rollo	30 m 32.80 yd
Resistencia a la luz ISO 105 B02:2002	4 Crudo; 7-8 Coffee; 6 Concrete

CUIDADO Y MANTENIMIENTO



1. Aspirado para mantenimiento regular.
2. No lavar.
3. No exprimir.
4. No usar secadora o sistemas de vapor.
5. Limpie suavemente con una esponja húmeda.

MANUFACTURA



Fabricación en el sentido del rollo.

Corte en frío. No requiere corte ultrasónico.

CERTIFICACIONES INTERNACIONALES



The Vertilux Collection posee las certificaciones más importantes de la industria. Sin embargo, algunas de ellas no aplican en todos los tejidos de nuestra colección. Por favor comuníquese a nuestro departamento de Servicio al Cliente para conocer sobre los diversos certificados disponibles para nuestros tejidos.

APLICACIONES



Persianas enrollables

Panel japonés

Únicamente para uso interior

IMPORTANTE: Recomendaciones de este tejido no son contractuales y no pueden utilizarse como reclamación para cancelaciones o devoluciones de pedidos. Estos datos técnicos pueden variar con el tiempo sin previo aviso. Las muestras de color aquí presentadas pueden no ser exactas al material usado para producir su pedido. No serán aceptadas devoluciones por variación mínima de color o textura.



ZULDEK
FÁBRICA DE PERSIANAS




GIANTS DECORATIVE

COLECCIÓN DECORATIVE

vertilux.mx

GIANTS

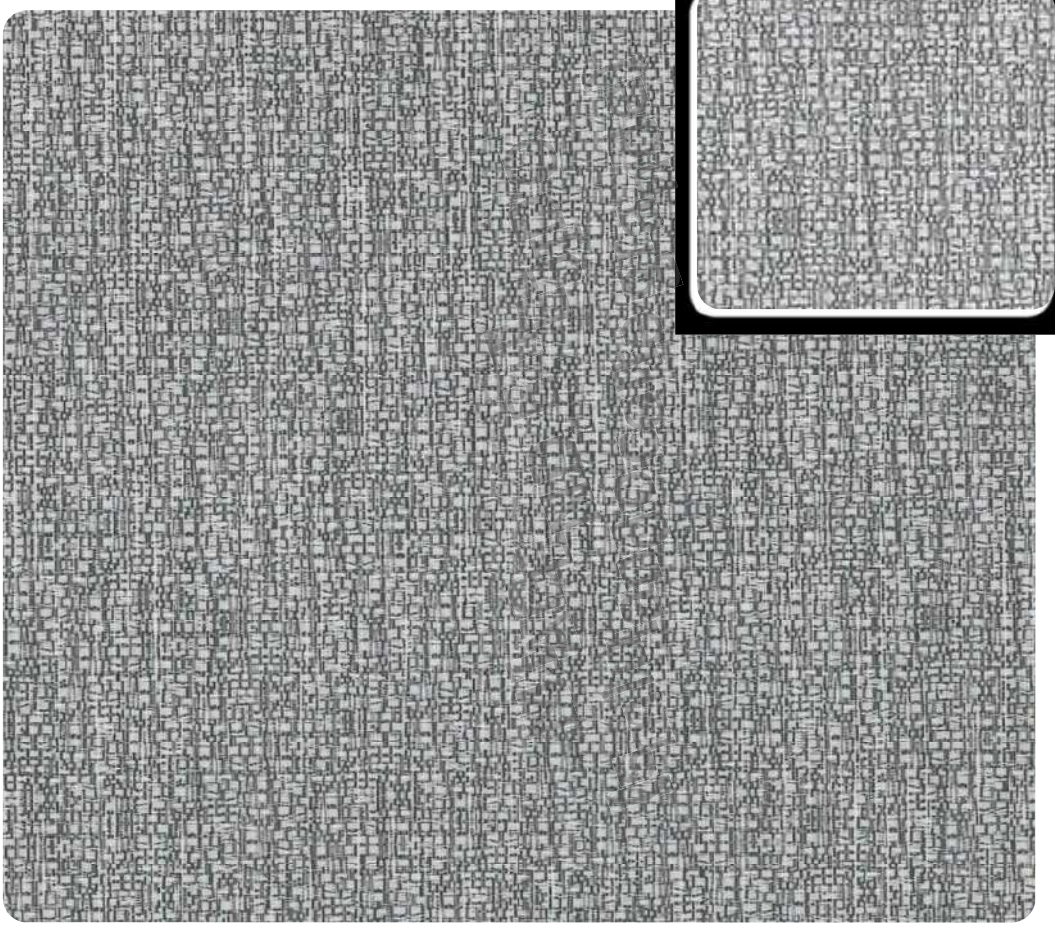

ONIX0-002-E4-00360

vertilux.mx

DECORATIVE GIANTS



PROPIEDADES TÉCNICAS

Composición	54% PES + 46% PES reciclado
Peso	209 g/m² ± 5%
Grosor	0.40 mm ± 5% 0.015 in ± 5%
Ancho de rollo	2.5 m 98 in
Largo de rollo	30 m 32.80 yd
Resistencia a la luz ISO 105 B02:2002	5-6 Onix; 6 Jade; 6 Nacar

CUIDADO Y MANTENIMIENTO



1. Aspirado para mantenimiento regular.
2. No lavar.
3. No exprimir.
4. No usar secadora o sistemas de vapor.
5. Limpie suavemente con una esponja húmeda.

MANUFACTURA



Fabricación en el sentido del rollo.

Corte en frío,
No requiere
corte ultrasónico.

CERTIFICACIONES INTERNACIONALES



The Vertilux Collection posee las certificaciones más importantes de la industria. Sin embargo, algunas de ellas no aplican en todos los tejidos de nuestra colección. Por favor comuníquese a nuestro departamento de Servicio al Cliente para conocer sobre los diversos certificados disponibles para nuestros tejidos.




N ACA RD-002-E4-00260

JADE O-002-E4-00160



MOD

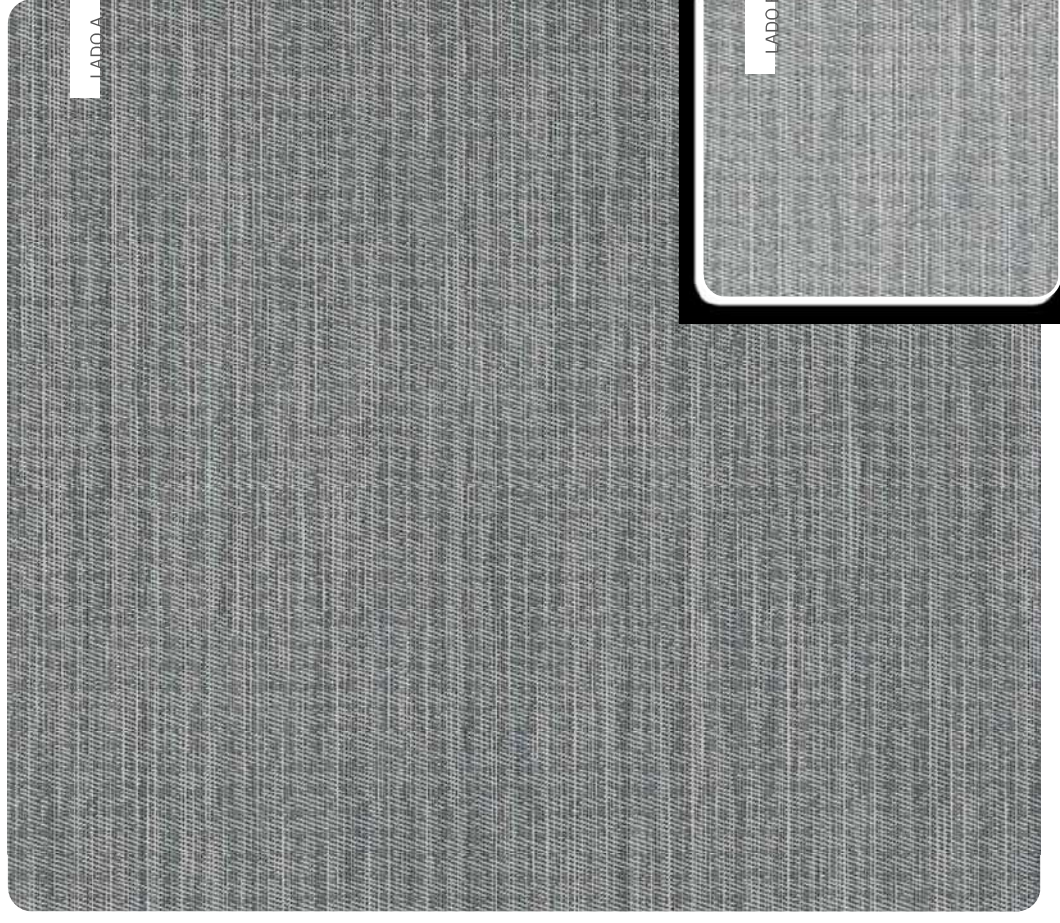

ONIX0-002-E5-00360



MOD
DECORATIVE

COLECCIÓN DECORATIVE

DECORATIVE
MOD



PROPIEDADES TÉCNICAS

Composición	54% PES + 46% PES reciclado
Peso	203 g/m² ± 5%
Grosor	0.40 mm ± 5% 0.015 in ± 5%
Ancho de rollo	2.5 m 98 in
Largo de rollo	30 m 32.80 yd
Resistencia a la luz ISO 105 B02:2002	5-6 Onix; 6 Nacar

CUIDADO Y MANTENIMIENTO



1. Aspirado para mantenimiento regular.
2. No lavar.
3. No exprimir.
4. No usar secadora o sistemas de vapor.
5. Limpiar suavemente con una esponja húmeda.

MANUFACTURA



Fabricación en el sentido del rollo.
Corte en frío,
No requiere
corte ultrasónico.

CERTIFICACIONES INTERNACIONALES




The Vertilux Collection posee las certificaciones más importantes de la industria. Sin embargo, algunas de ellas no aplican en todos los tejidos de nuestra colección. Por favor comuníquese a nuestro departamento de Servicio al Cliente para conocer sobre los diversos certificados disponibles para nuestros tejidos.

APLICACIONES



Persianas enrollables
Panel japonés
Únicamente para uso interior

MOD

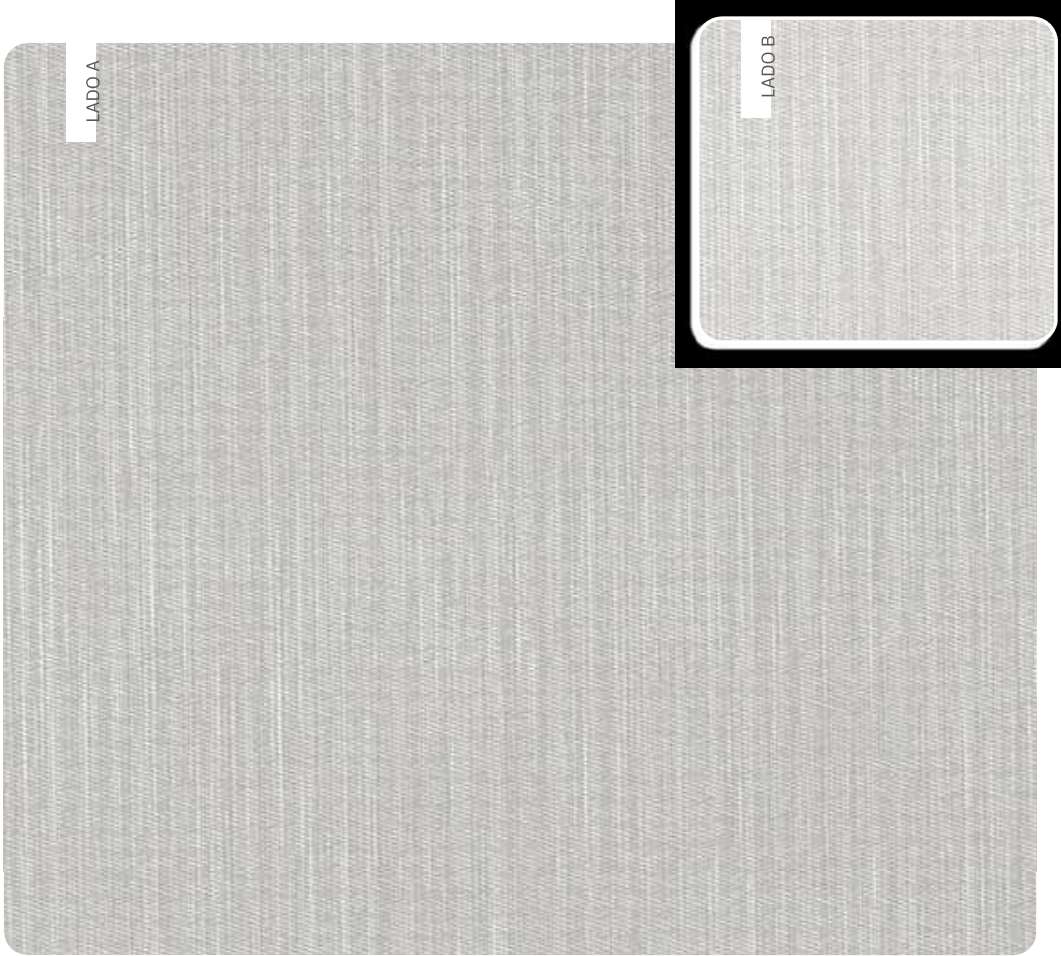

N ACA R0-002-E5-00260

IMPORTANTE: Recomendaciones de este tejido no son contractuales y no pueden utilizarse como reclamación para cancelaciones o devoluciones de pedidos. Estos datos técnicos pueden variar con el tiempo sin previo aviso. Las muestras de color aquí presentadas pueden no ser exactas al material usado para producir su pedido. No serán aceptadas devoluciones por variación mínima de color o textura.



ZULDEK
FÁBRICA DE PERSIANAS

DAKU



SILVER0-002-A9-00400




DAKU
DECO-STYLES

COLECCIÓN DECORATIVE


DECO-STYLES

DAKU

DAKU

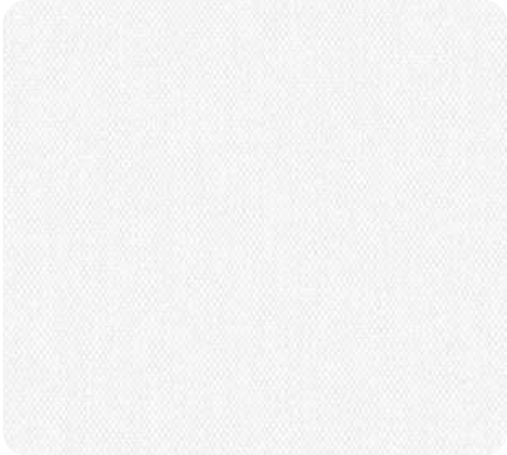

WHITE0-002-A9-00100

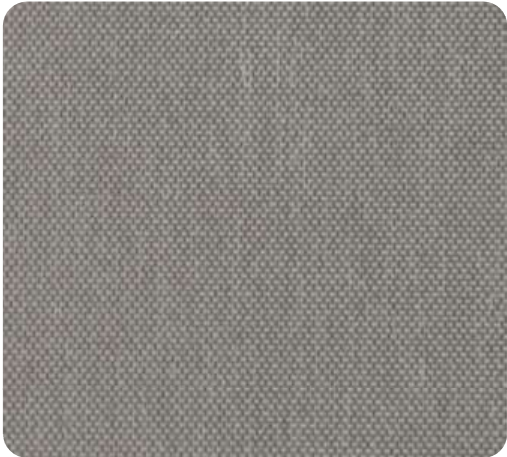

GREY 0-002-A9-00300



BEIGE0-002-A9-00200

TECHNICAL PROPERTIES

Composition	Weight	Thickness	100% PES
Roll Width	UV Blockage	Light	212 g/m² ± 5%
Fastness (Xenotest grade)			0.42 mm ± 5%
			2.65 m
			100 %
			Coated Side: 6/8

SUN CONTROL PROPERTIES

COLOR	Tv (%)	Rv (%)	Av (%)
White	32	52	16
Beige	24	39	37
Grey	16	27	57
Silver	16	23	63
Brown	15	21	64
Marengo	12	18	70

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not rub.
4. Do not steam.
5. Do not dry clean.

M A NUFACT URING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order.



ZULDEK
FÁBRICA DE PERSIANAS



ASPEN FR

URBAN-CHIC

COLECCIÓN DECORATIVE

vertilux.mx

ASPEN FR




ICE 0-002-05-00200

vertilux.mx

URBAN-CHIC
ASPEN FR



ASPEN FR

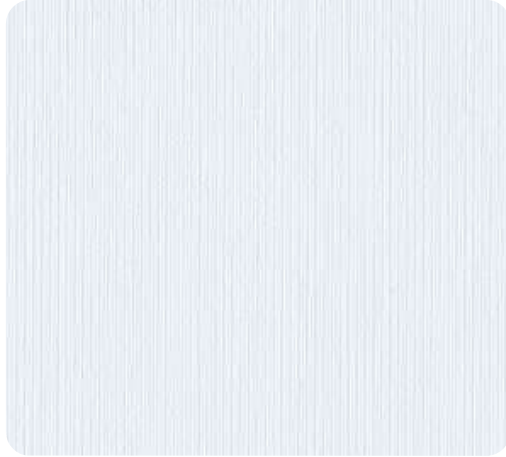

WHITE0-002-05-00100



MUSHROOM0-002-05-00300



GREIGE0-002-05-00400

TECHNICAL PROPERTIES

Composition	100% PES
Weight	194.8 g/m ² ± 5% 5.74 oz/yd ² ± 5%
Thickness	0.33 mm ± 5% 0.012" in ± 5%
Roll Width	2.8 m 110.2 in
Roll Length	40 m 43.74 yd
Tensile Strength	Warp: 120 daN Weft: 1400 daN
Light Fastness	4 Xenotest Grade

*Performance evaluations conducted by independent laboratorers.

SUN CONTROL PROPERTIES*

UPF	+50 UV-A: 0.1% UV-B: 0.1%
UV-R Blocking	99.9%
UV-A Blocking	99.9%
UV-B Blocking	99.9%
Transmittance (Ts)	1.5%
Reflectance (Rs)	13.9%
Absorption (As)	84.6%

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

MANUFACTURING



Use Only on
Roll Direction

COLD
Ultrasonic Cut
NOT Required

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.



IMPORTANT: The values and recommendations in this card are not contractual and can not be used for legal purposes. They are only for informational purposes. Color samples may not necessarily be an exact match of the material to be used to produce your project. Returns will not be accepted due to minor variations of color or texture.

APPLICATIONS



Roller
Shades


Sliding
Panels

Indoor Use
Only



ZULDEK
FÁBRICA DE PERSIANAS

TOUAREG

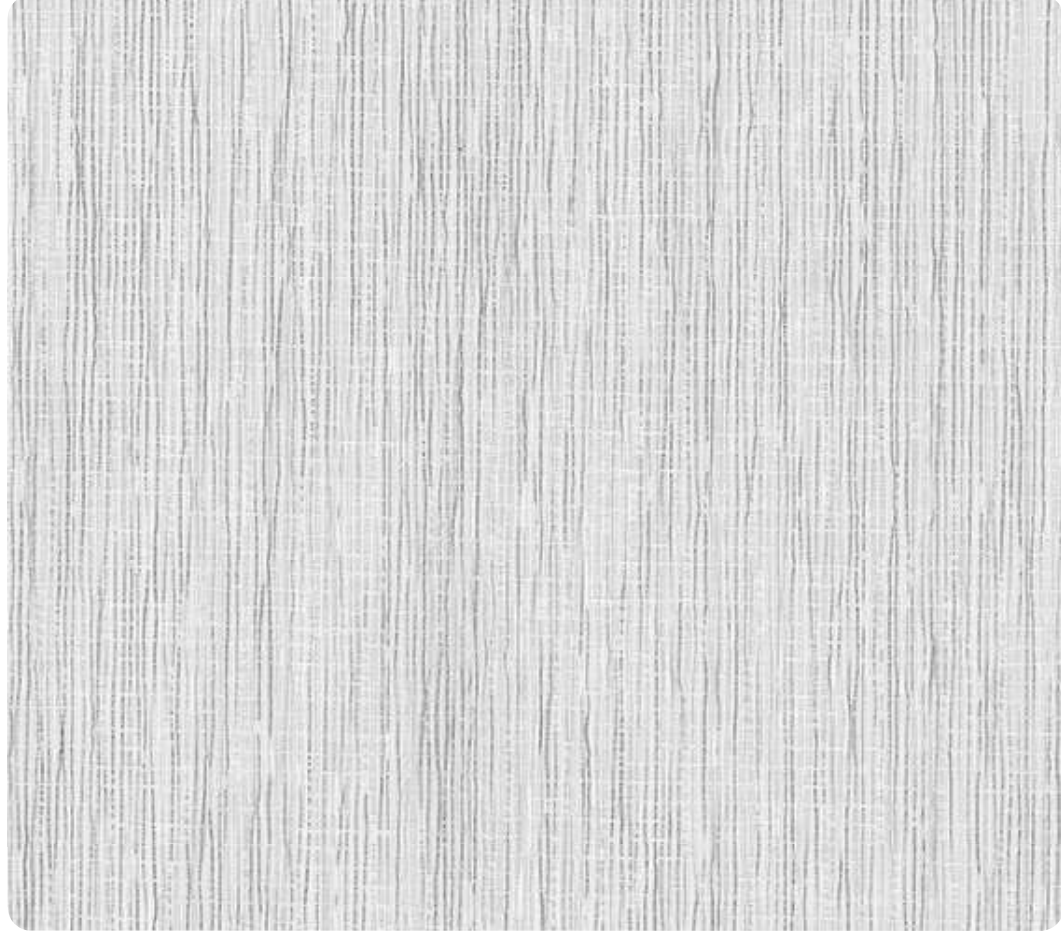

GREY 0-002-16-00998




TOUAREG
DECO-STYLES

COLECCIÓN DECORATIVE

DECO-STYLES
TOUAREG

TOUAREG

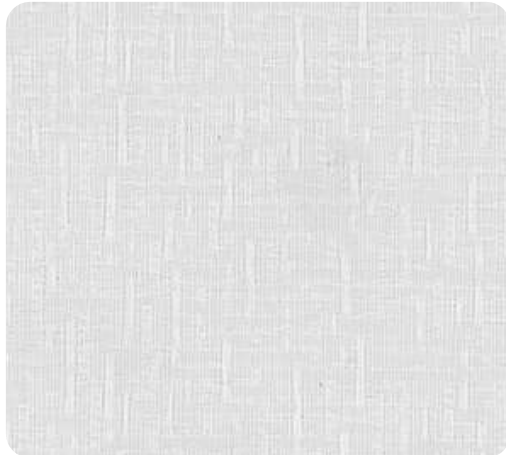

WHITE0-002-16-00198



SAND 0-002-16-00498



BEIGE0-002-16-00298



STONE 0-002-16-01698

TECHNICAL PROPERTIES		SUNLIGHT CONTROL PROPERTIES			
Composition	100% P<5	COLOR	T _{50%}	R _{50%}	A _{50%}
Weight	White: 275 g/m² ± 10% 8.11 oz/yd² ± 10% Other Colors: 308 g/m² ± 10% 9.08 oz/yd² ± 10%	Beige	15	43	42
Thickness	White: 0.5 mm ± 5% 0.020 in ± 5% Other Colors: 0.6 mm ± 5% 0.024 in ± 5%	Grey	24	55	21
Roll Width	2.5 m 96 in	Sand	18	45	37
Light Fastness	> 6 Xenotest Grade	Stone	13	40	47
		White	30	60	10

*For performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE

- 1. Vacuum clean for regular maintenance.
- 2. Wipe gently with a wet sponge.
- 3. Do not wash.
- 4. Do not wring dry.
- 5. Do not bleach.
- 6. Do not dry clean nor use steam cleaning.

MANUFACTURING

- Use Only on Roll Direction
- COLD Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS

The Veritlux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS

Roller Shades

Sliding Panels

Indoor Use Only



ZULDEK
FÁBRICA DE PERSIANAS

XANDER



GREY 0-002-89-00400




XANDER
DECO-STYLES

COLECCIÓN DECORATIVE

XANDER



WHITE0-002-89-00100

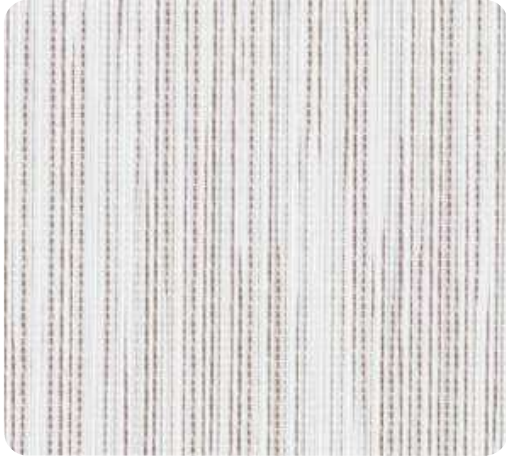

OFF WHITE0-002-89-00200




IVORY0-002-89-00300



SAND 0-002-89-00500

XANDER

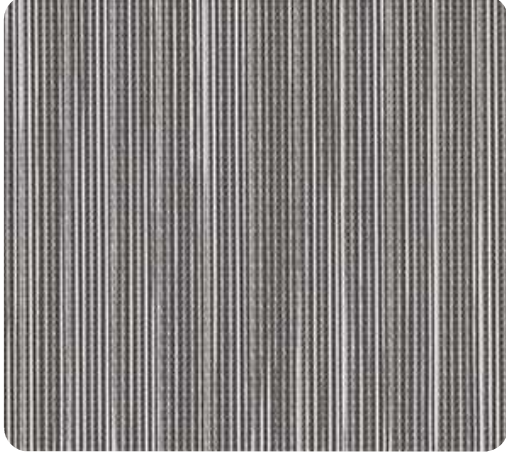


CHARCOAL 0-002-89-00600



ZULDEK
FÁBRICA DE PERSIANAS

SHANTUNG

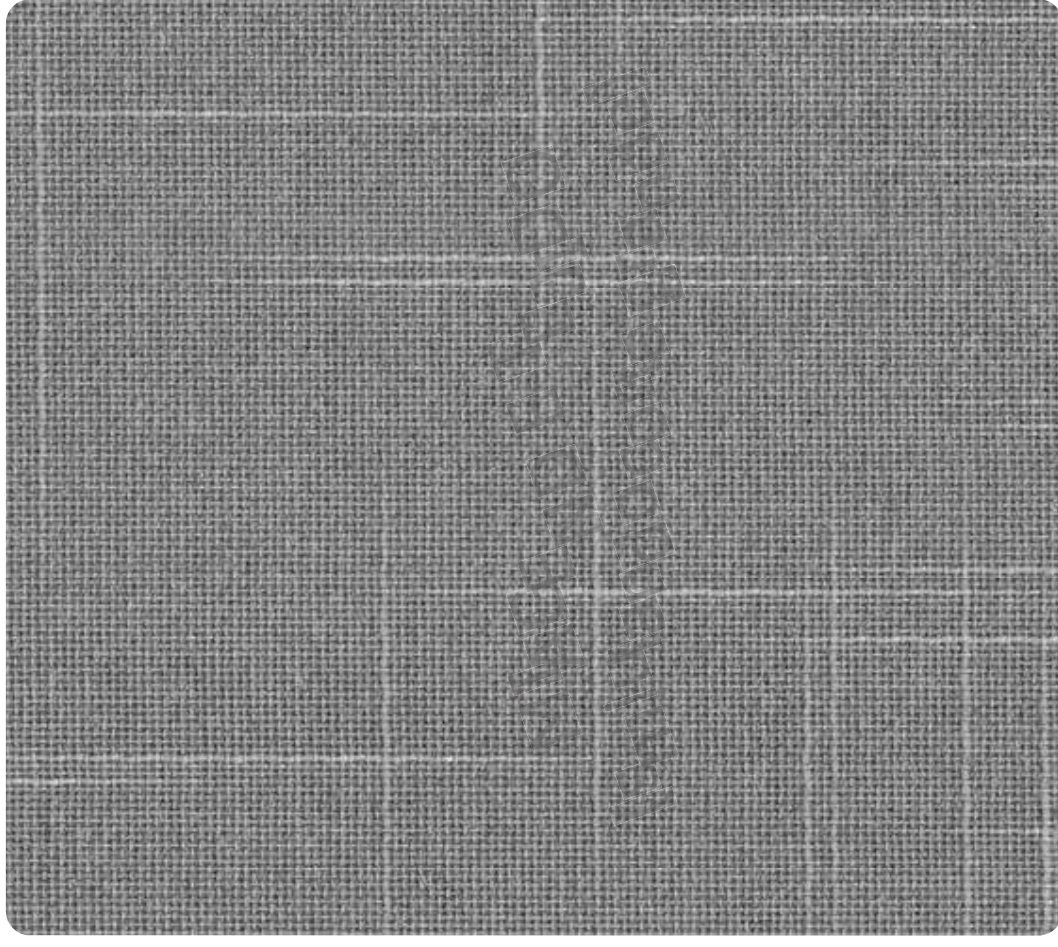

GREY 0-002-80-06098



SHANTUNG

DECO-STYLES

COLECCIÓN DECORATIVE


SHANTUNG




COFFEE 0-002-80-03598



TAUPE 0-002-80-16098

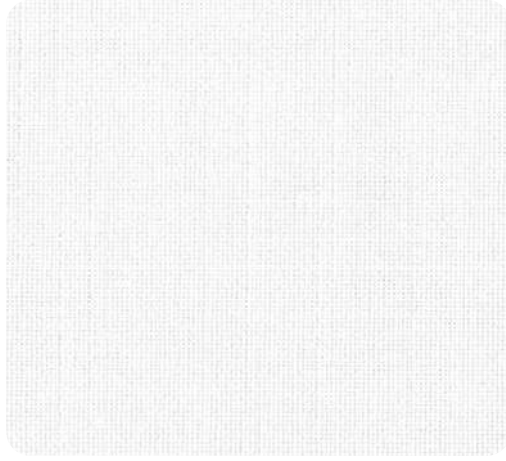


WHITE 0-002-80-01098

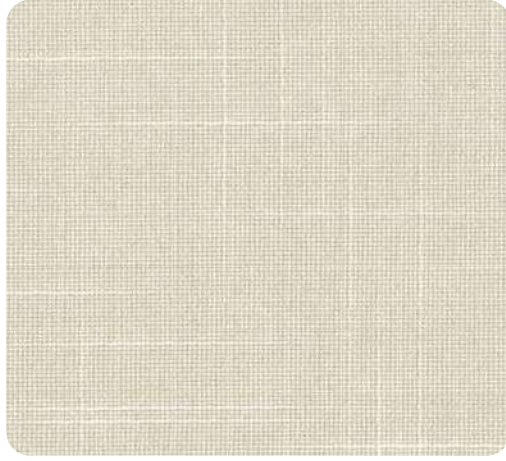

BEIGE 0-002-80-03098

SHANTUNG

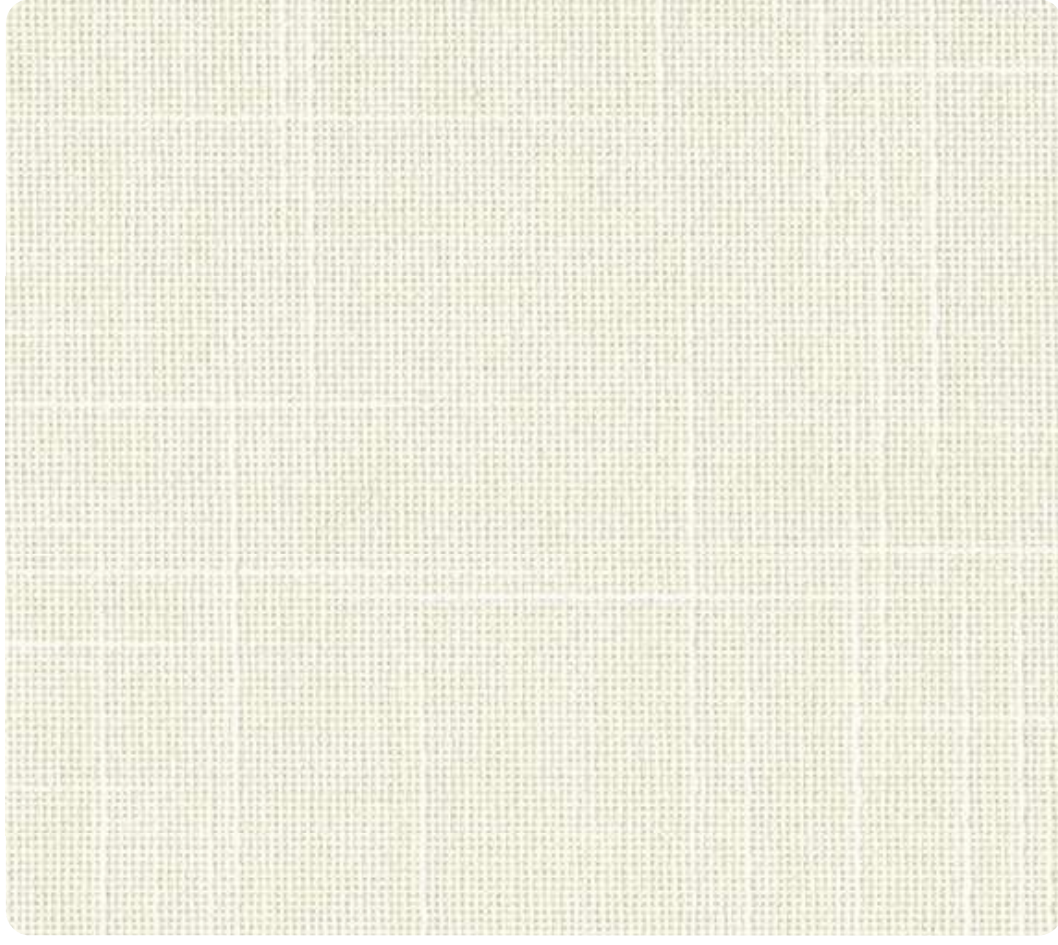


CUSTARD 0-002-80-02098



ZULDEK
FÁBRICA DE PERSIANAS

IBIZA

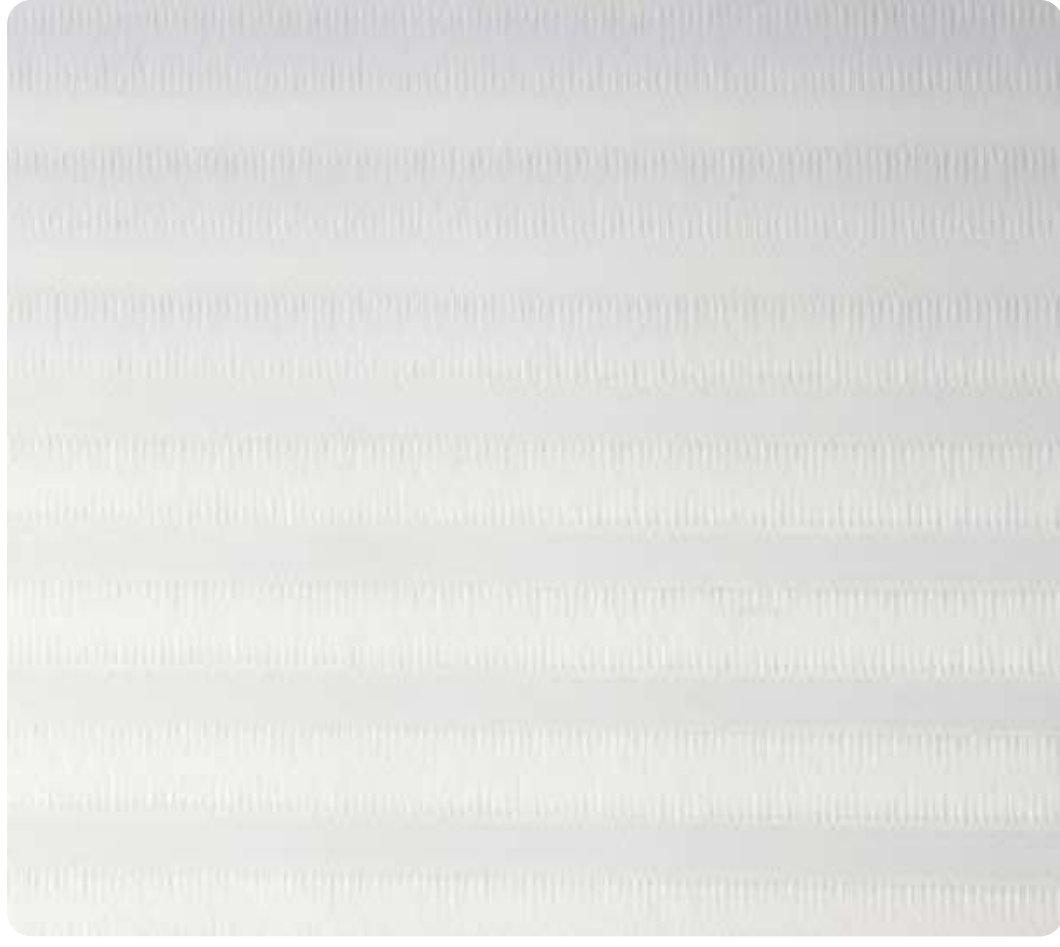

WHITE0-002-53-01098



IBIZA
DECO-STYLES

COLECCIÓN DECORATIVE

DECO-STYLES
IBIZA


IBIZA



PECAN 0-002-53-02098



MAHOGANY0-002-53-03098

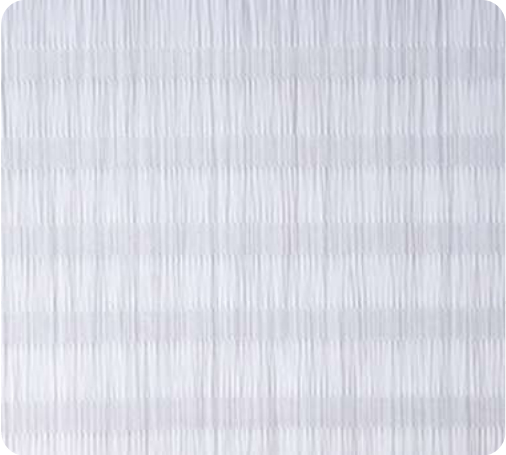

GREY 0-002-53-04098

TECHNICAL PROPERTIES

Composition	100% PES	
Weight	220 g/m ² ± 5% 6.48 oz/yd ² ± 5%	
Thickness	0.48 mm ± 5% 0.019 in ± 5%	
Roll Width	2.5 m 98 in	
Light Fastness	6-7/8	

*Performance evaluations conducted by independent laboratories

SUNLIGHT CONTROL PROPERTIES

COLOR	T _{SH} (%)	R _{SH} (%)	A _{SH} (%)
Grey	22	45	33
Mahogany	03	15	82
Pecan	08	30	62
White	30	62	08

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

MANUFACTURING



Use Only on Roll Direction

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS



The Vertlux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS



Roller Shades



Sliding Panels



Indoor Use Only

IMPORTANT: The values and recommendations in this card are not contri actual and can not be used for comparison with other products. They are only intended to provide a general overview. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.



ZULDEK
FÁBRICA DE PERSIANAS

BIMINI



ASPHALT 0-002-18-01998




BIMINI
URBAN-CHIC

COLECCIÓN DECORATIVE

BIMINI



WHITE0-002-18-00198

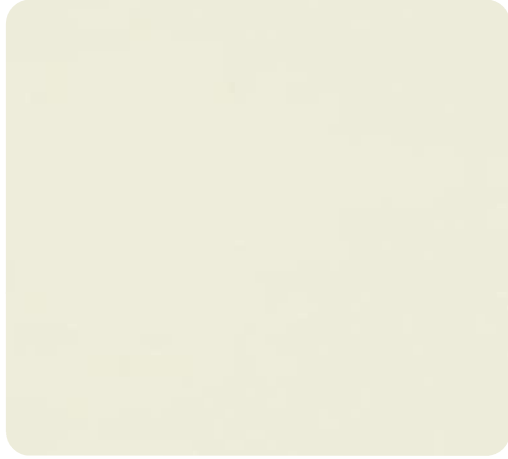

IVORY0-002-18-0298

BIMINI



LIGHT GREY0-002-18-01898



ASH 0-002-18-00598



LINEN 0-002-18-00398



CAMEL 0-002-18-01198



TAN 0-002-18-00898




STONE 0-002-18-00998



ZULDEK
FÁBRICA DE PERSIANAS

SOUTH BEACH

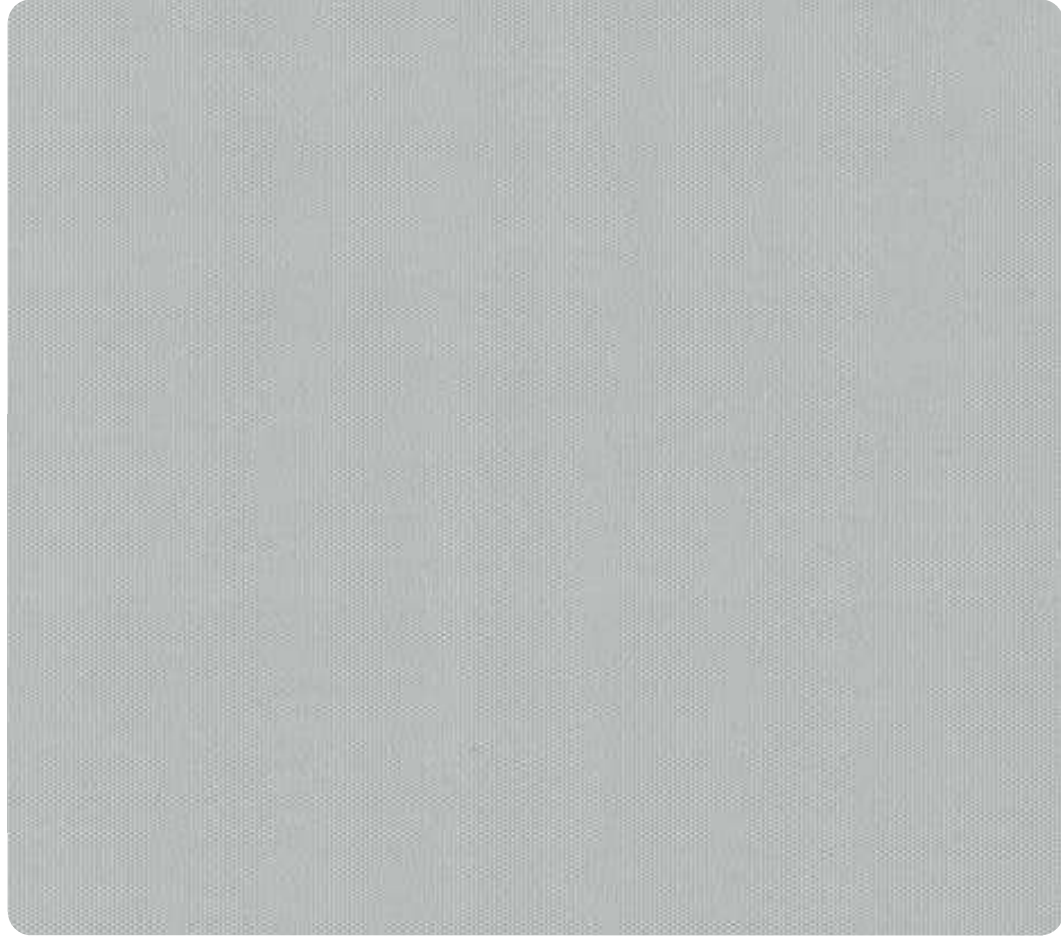


PEARL 0-002-92-01598



SOUTH BEACH
URBAN CHIC

COLECCIÓN DECORATIVE


SOUTH BEACH

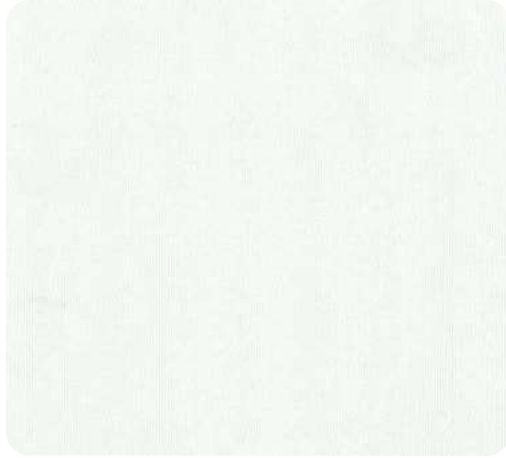


WHITE 0-002-92-00198



BEIGE 0-002-92-00498

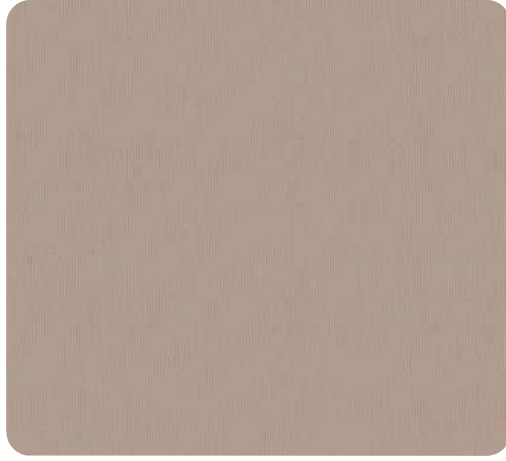


SAND 0-002-92-00598

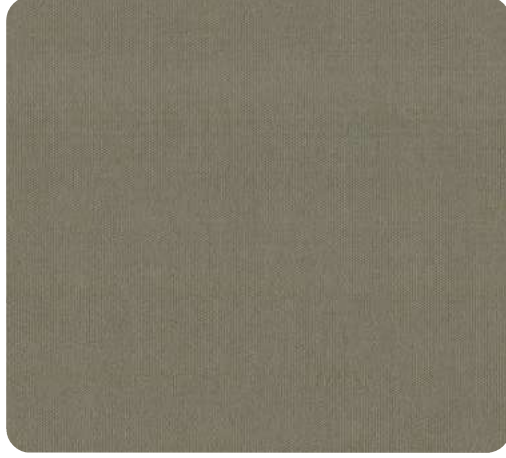


STONE 0-002-92-01698


SOUTH BEACH

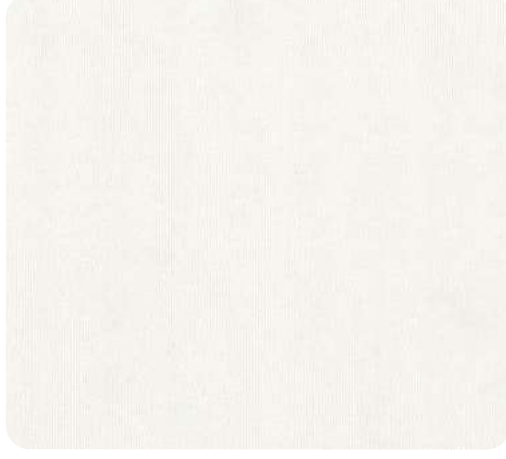

CUSTARD 0-002-92-00298

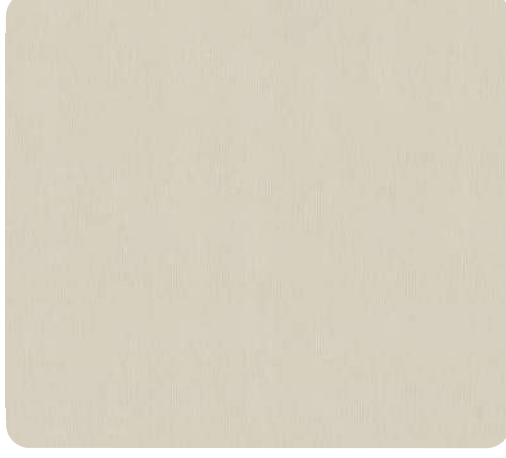

IVORY 0-002-92-00398

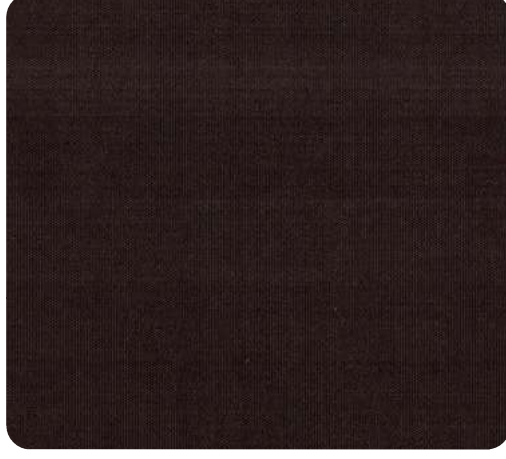

CHOCOLATE 0-002-92-00898



EBONY 0-002-92-01798