




2900-5%




PEARL GREY 0-004-52-07198

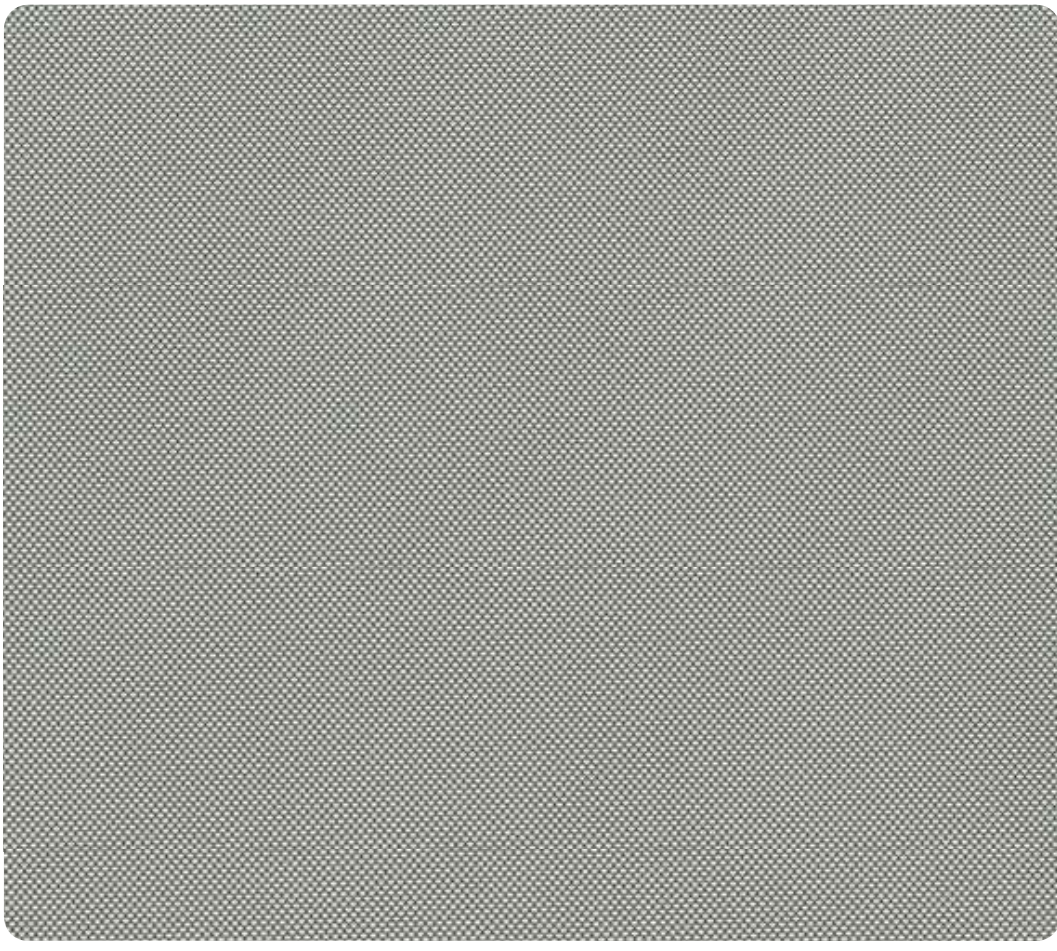


2900-5%
VX SCREEN


2900-5%

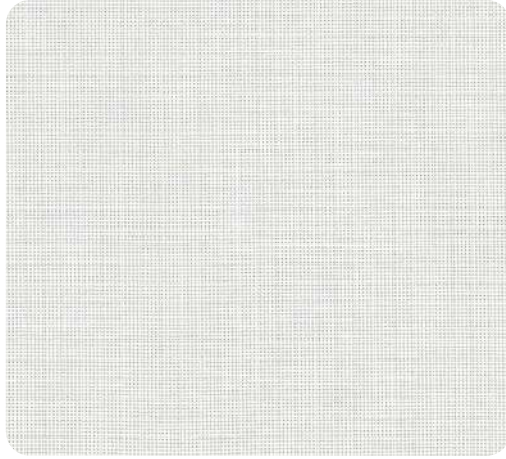

WHITE 0-004-52-00263 | 00278 | 00298 | 00218

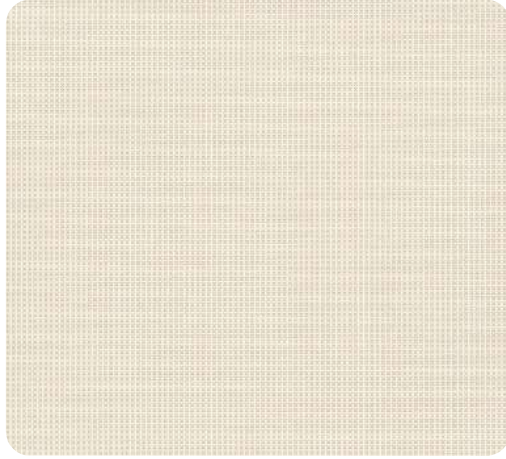

LIMESTONE 0-004-52-24098

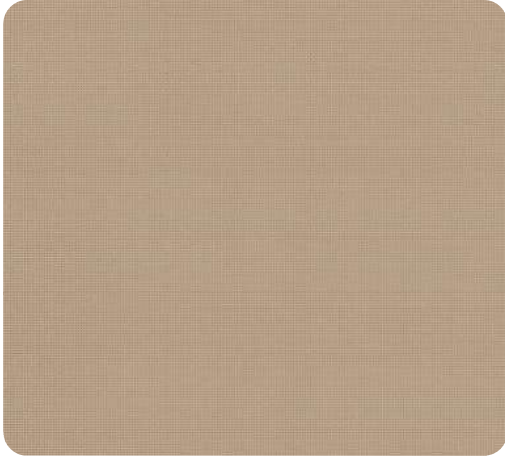


TAUPE SAND 0-004-52-21098




WHITE LINEN 0-004-52-22063 | 22078 | 22098 | 22018


2900-5%

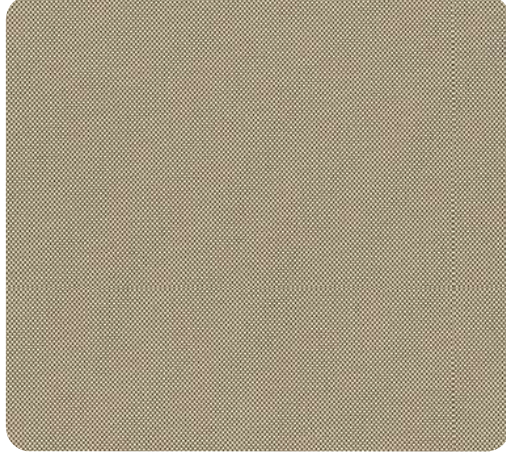


LINEN MOCHA 0-004-52-31598

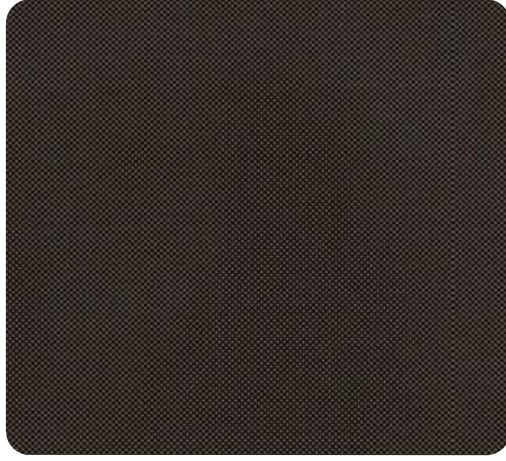

CHESTNUT 0-004-52-18363 | 18378 | 18398 | 18318

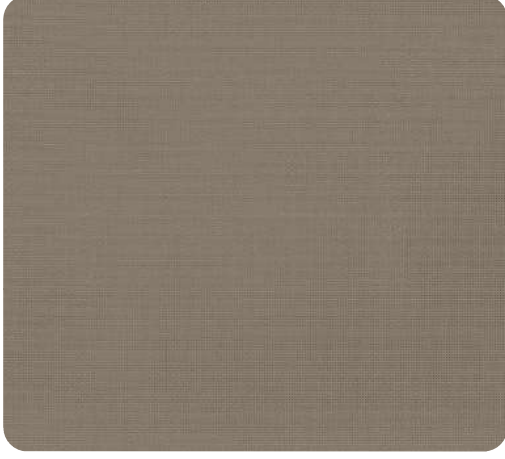


PEWTER 0-004-52-23098

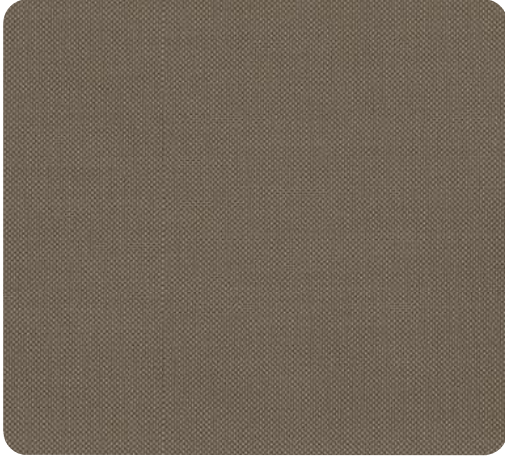


SLATE 0-004-52-27098

2900-5%

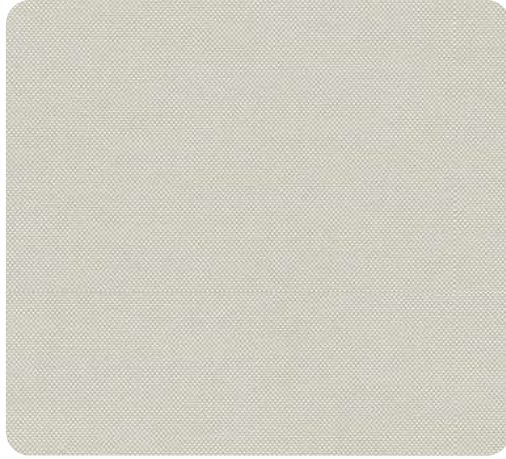

LIGHT GREY0-004-52-00798

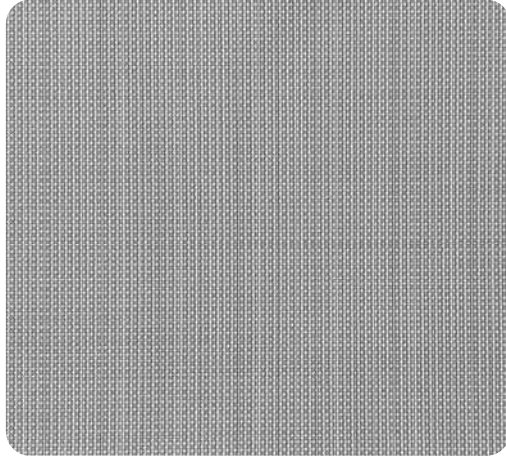


GREY JASPER 0-004-52-25098


2900-5%




EBONY GREY0-004-52-11098

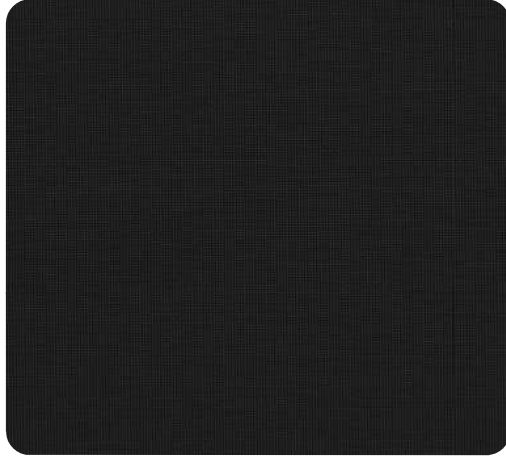

EBONY 0-004-52-01963 | 01978 | 01998 | 01918

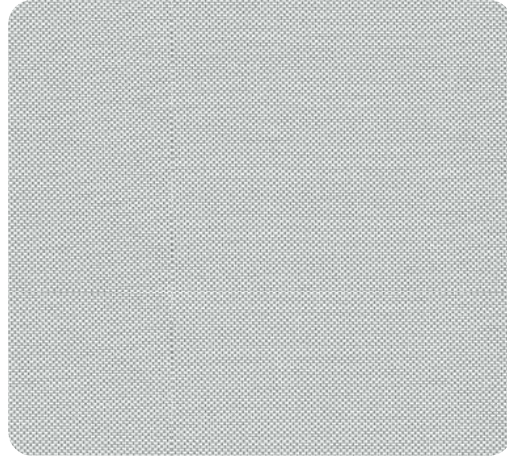


WHITE PEARL 0-004-52-02763 | 02778 | 02798 | 02718 EBONY PEARL 0-004-52-20063 | 20078 | 20098 | 20018

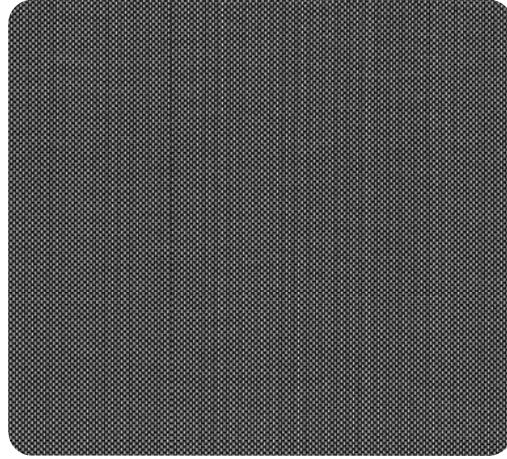




3000-1%
VX SCREEN

3000-1%

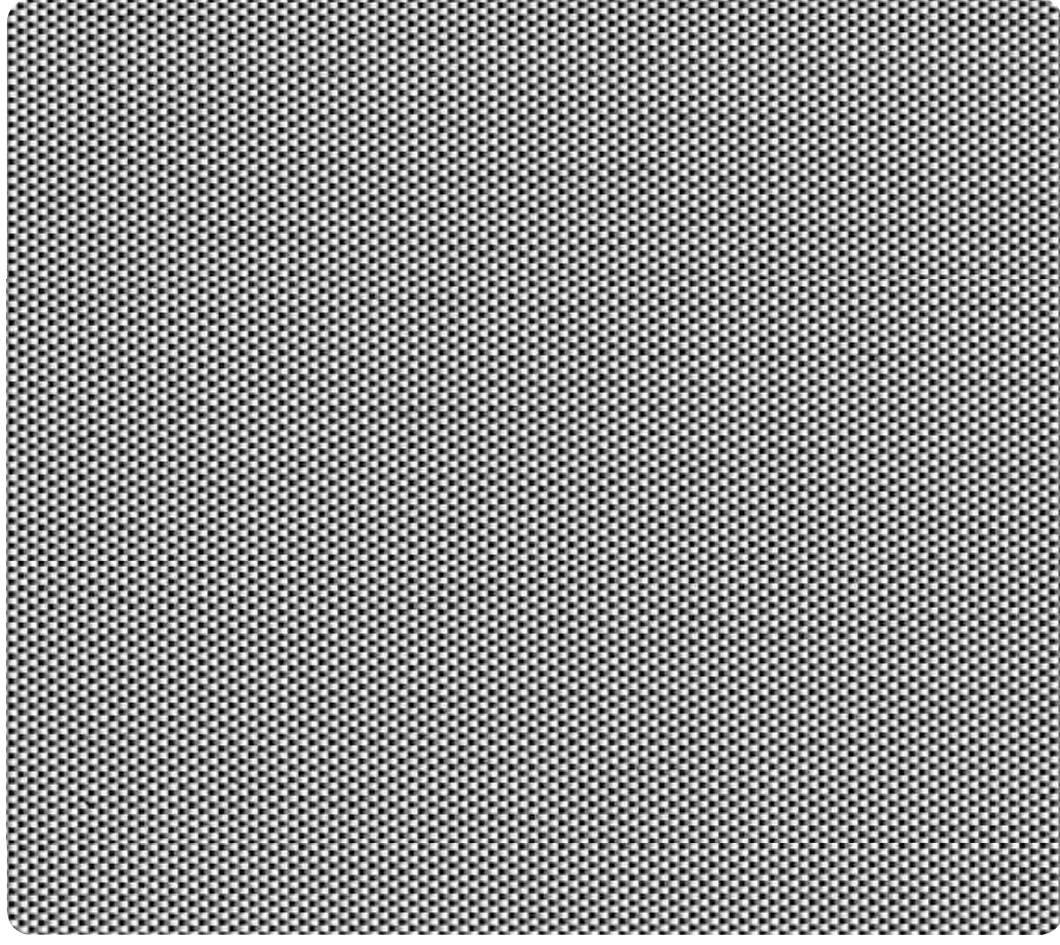


EBONY PEARL 0-004-86-20078 | 20098 | 20018

3000-1%

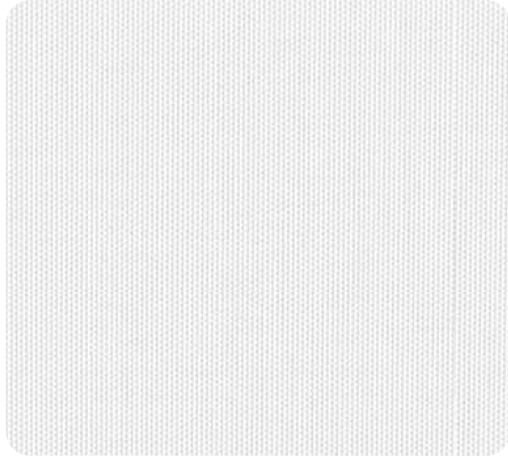


WHITE 0-004-86-00298 | 00218

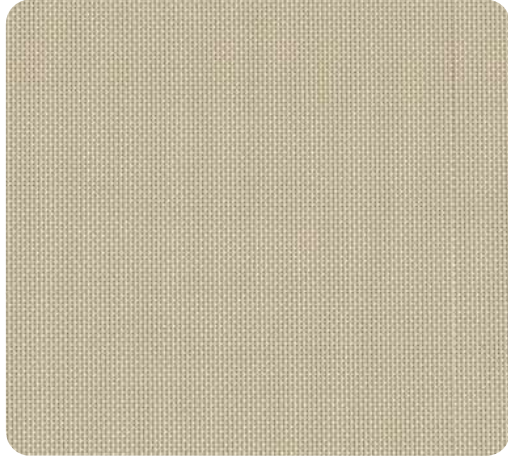

LINEN 0-004-86-00378 | 00398 | 00318


3000-1%

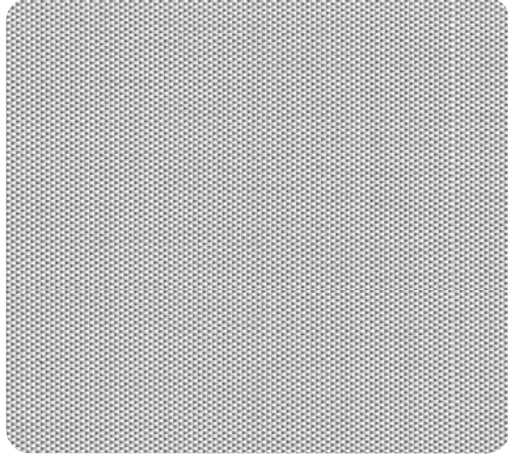


WHITE PEARL 0-004-86-02798 | 02718




BROWN CHOCOLATE 0-004-86-02598 | 02518

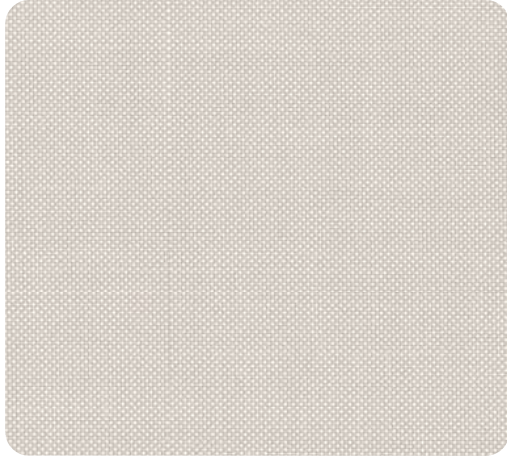


WHITE LINEN 0-004-86-22098 | 22018

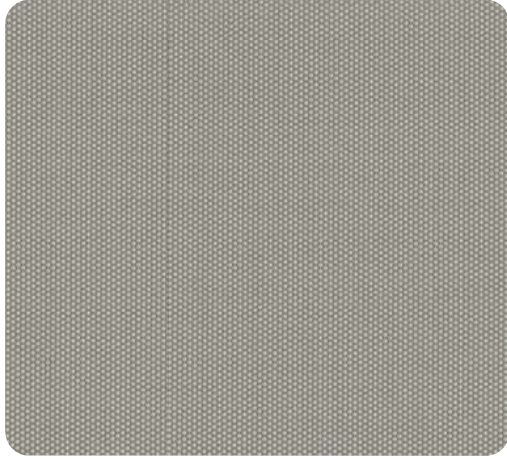

TAUPE 0-004-86-07078 | 07098 | 07018

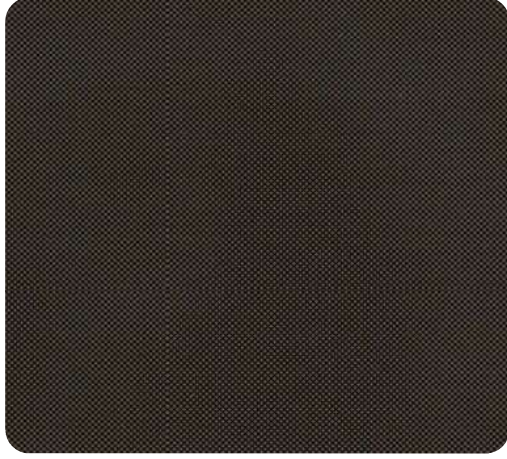


CHESTNUT 0-004-86-18378 | 18398 | 18318

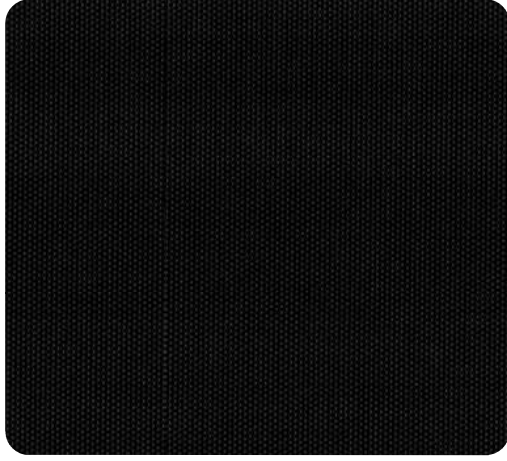

EBONY 0-004-86-01998 | 01918



—INWEGIO

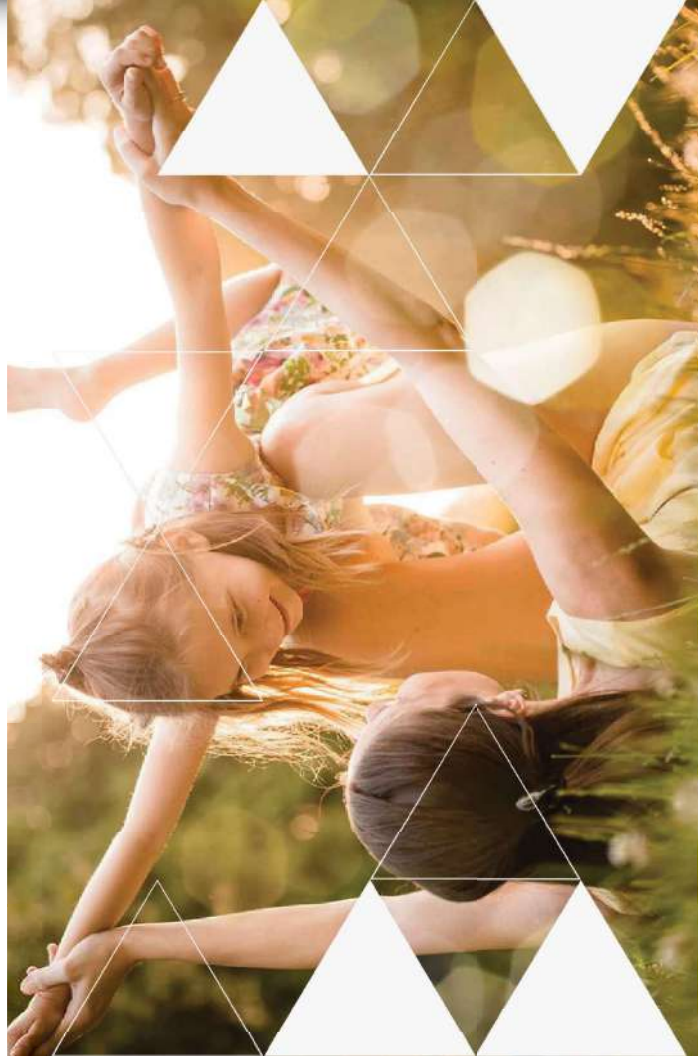

NATURE 3%

VX SCREEN

NATURE 3%



LINEN 0-004-53-00398

NATURE 3%

VX SCREEN NATURE-3%



TECHNICAL PROPERTIES

Composition	35.5% PES + 64.5% PVC
Weight	416 g/m² (± 5%) 12.27 oz/yd² (± 5%)
Thickness	0.58 mm (± 5%) 0.023 in (± 5%)
Yarn Diameter	0.34 mm
Roll Width	2.5 m 98 in
Roll Length	25 m 27 yd
Openness Factor	~ 3%
UV Blockage	~ 97%
Mesh/in	Warp: 54 Fill: 46
Light Fastness	Class 5
Tensile Strength	Warp: 380 lb Weft: 380 lb
Tearing Strength	40 daN
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.



MANUFACTURING



Can be
Railroaded



COLD
Ultrasonic Cut
NOT Required

INTERNATIONAL CERTIFICATIONS



The Vertlux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS



Roller
Shades




Sliding
Panels



Indoor Use
Only

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to color variations or color or texture.

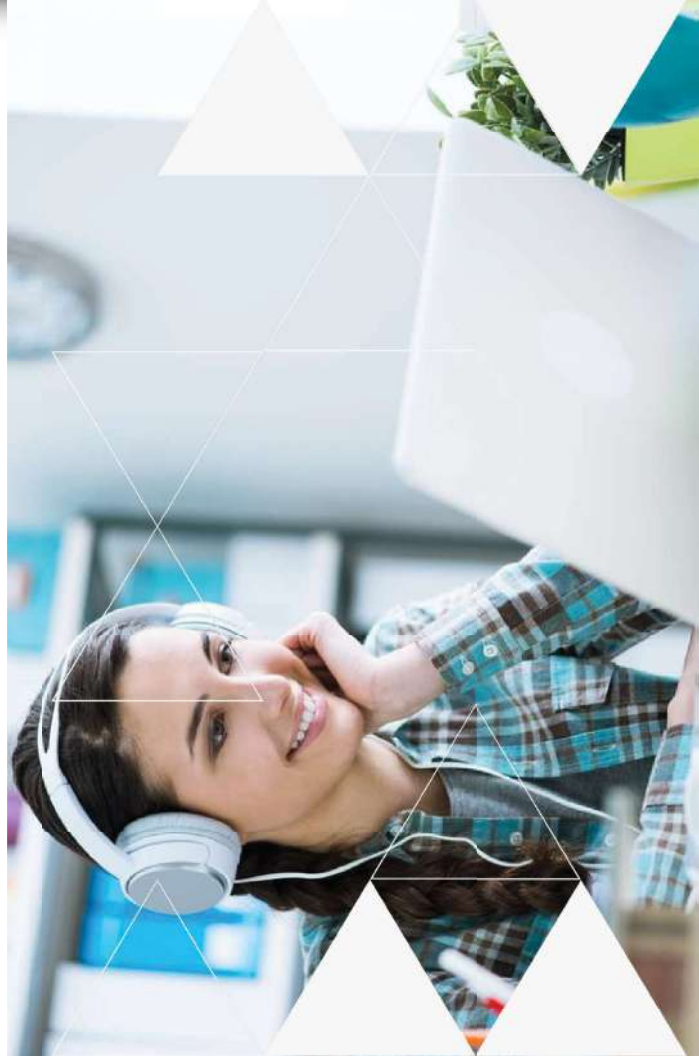

NATURE 5%

VX SCREEN

NATURE 5%



LINEN 0-004-55-00398

NATURE 5%



IVORY LINENO-004-55-00498

TECHNICAL PROPERTIES

Composition	35.5% PES + 64.5% PVC
Weight	385g/m ² (± 5%) 11.35 oz/yd ² (± 5%)
Thickness	0.58 mm (± 5%) 0.023 in (± 5%)
Yarn Diameter	0.34 mm
Roll Width	2.5 m 98 in
Roll Length	25 m 27 yd
Openness Factor	~ 5%
UV Blockage	~ 95%
Mesh/in	Warp: 48 Fill: 48
Light Fastness	Class 5
Tensile Strength	Warp: 380 lb Fill: 380 lb
Tearing Strength	40 daN
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

MANUFACTURING



INTERNATIONAL CERTIFICATIONS




The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

APPLICATIONS





BARU-10%

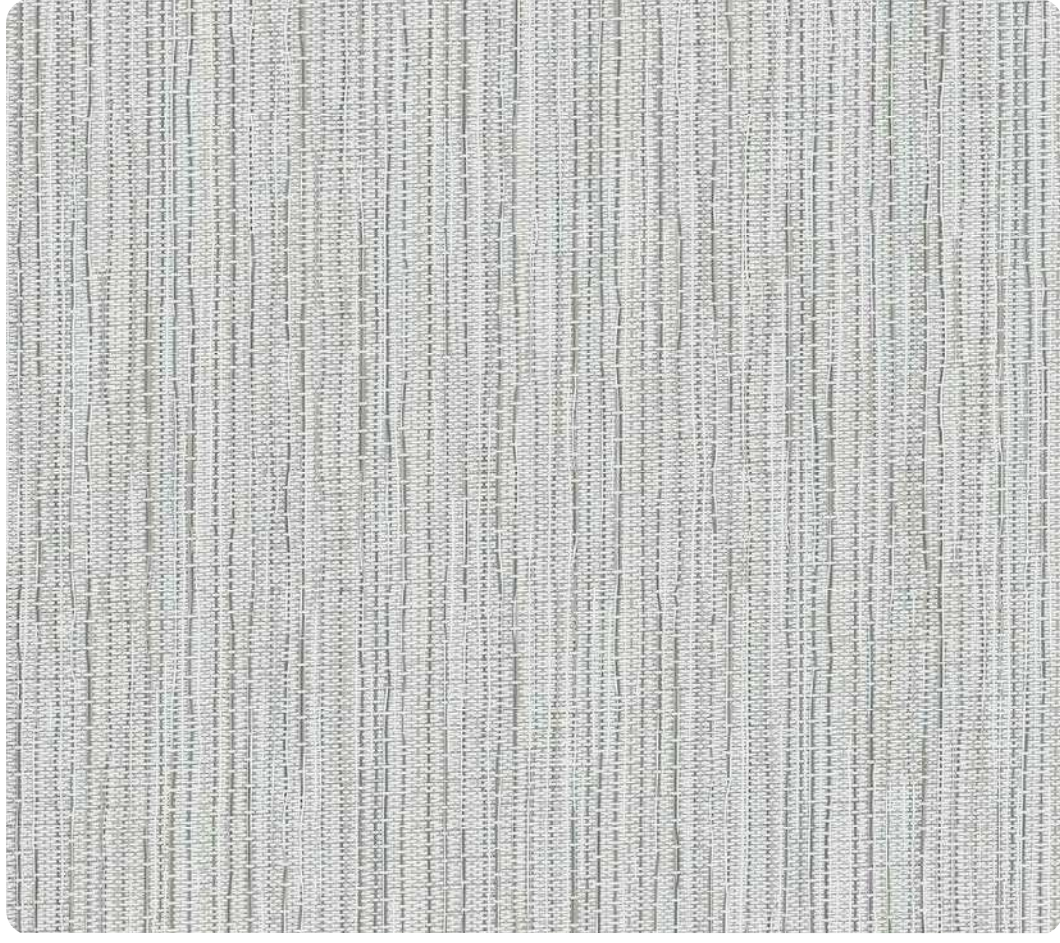


DOVE 0-004-74-00198




BARU-10%
VX SCREEN

BARU-10%

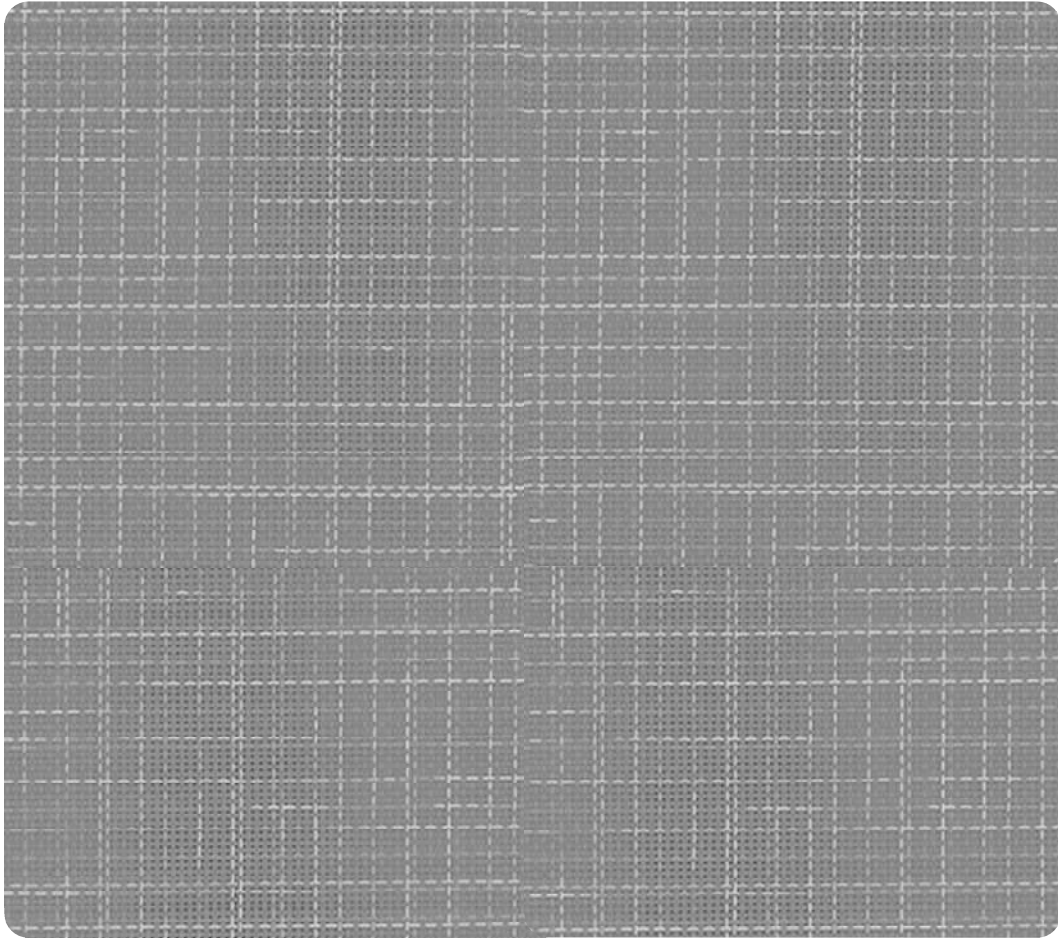


WOLF 0-004-74-00298


BARU-10%

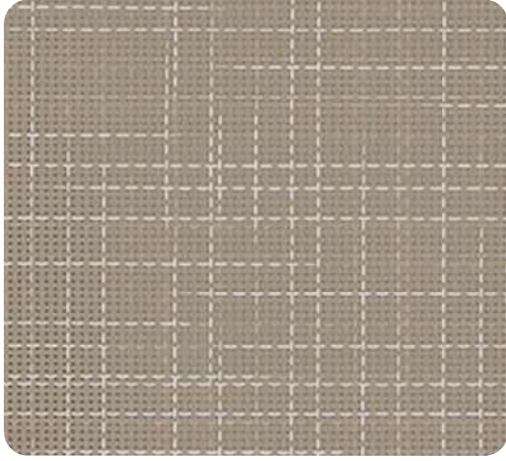


CAMEL 0-004-74-00398

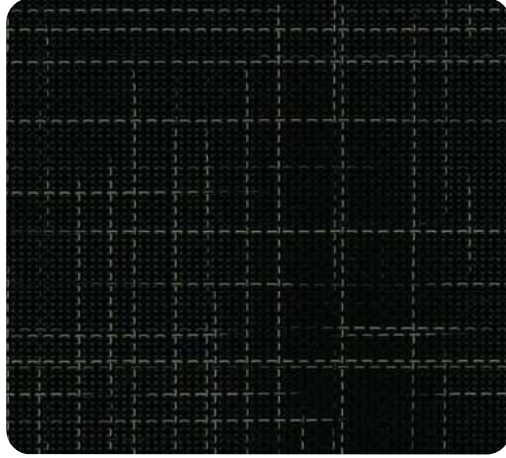

PANTHER 0-004-74-00498

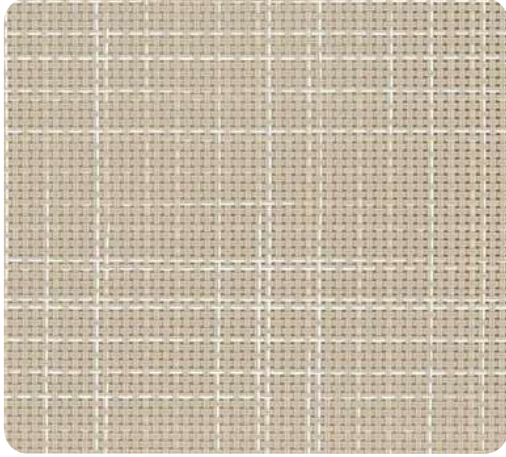

BAMBI 0-004-74-00598

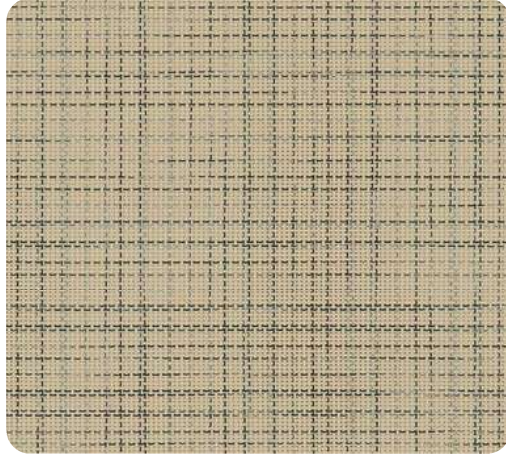


LEOPARD 0-004-74-00698



BRYSON-11%


VX SCREEN

BRYSON-11%

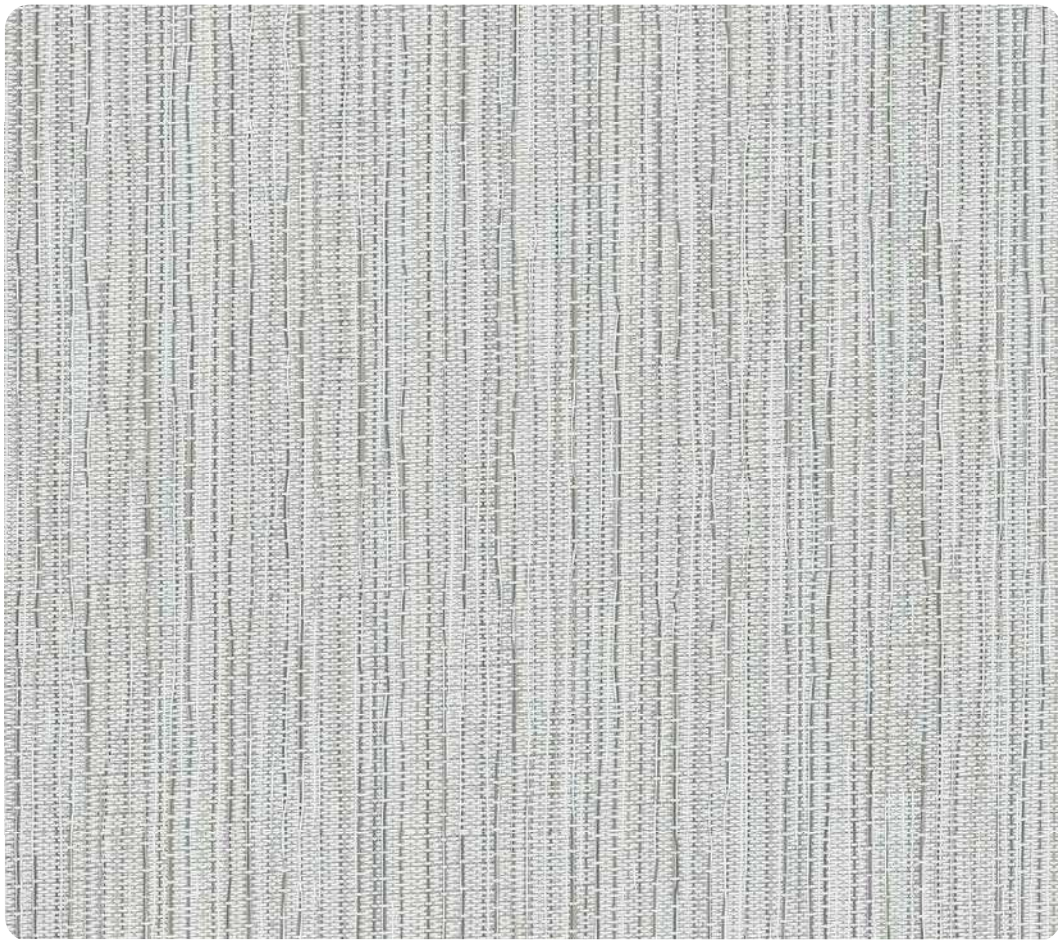


LIGHT GREY0-004-72-00198

BRYSON-11%

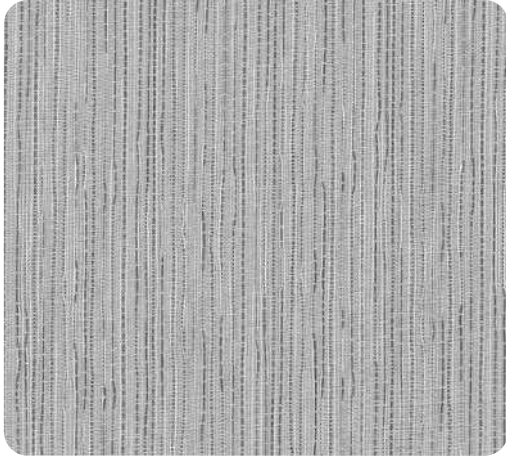


SILVER 0-004-72-00298

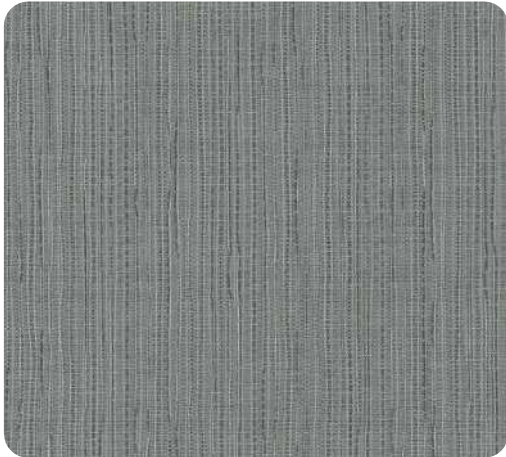

ASH 0-004-72-00398



STONE 0-004-72-00498

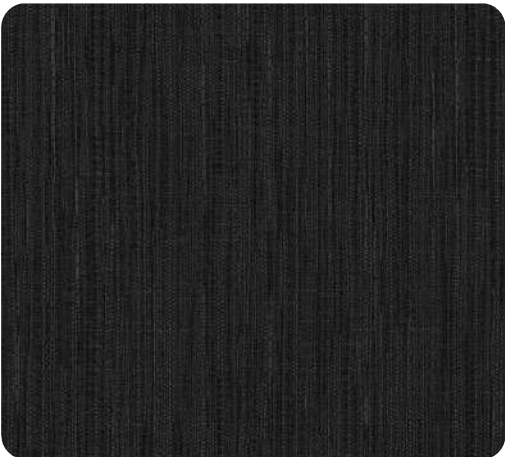

GRAPHITE 0-004-72-00598

VX SCREEN
BRYSON-11%



TECHNICAL PROPERTIES

Composition	Weight	Thickness
Yarn Diameter	Roll	Width
Roll	Width	Roll
Length	Openness	Factor
Blockage Mesh/in	Light	Fastness
Tensile Strength	Tearing	Strength
Flame Retardant		
16% PES + 84% PVC		
UV ² 26 g/m ² ± 5% 12.56 oz/yd ² ± 5%		
0.65 mm ± 5% 0.025 in ± 5%		
Warp: 0.42 mm Fill: 0.32 mm		
2.5 m 98 in		
27.43 m 30 yd		
~ 11%		
~ 89%		
Warp: 40 Fill: 32		
7 - 8 Xenotest Grade		
Warp: 208.2 lb Weft: 89.7 lb		
Warp: 28.3 lbf Weft: 31.8 lbf		
NFPA 701		

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUNLIGHT CONTROL PROPERTIES

COLOR	TS(%)	RS(%)	AS(%)	TV(%)
Ash	17	24	59	13
Graphite	13	09	78	12
Light Grey	24	48	28	21
Silver	20	33	47	16
Stone	16	20	64	13

M A NUFACT URING



Use Only on Roll Direction

Ultrasonic Cut NOT Required


APPLICATIONS



Roller Shades

Sliding Panels


Indoor Use Only

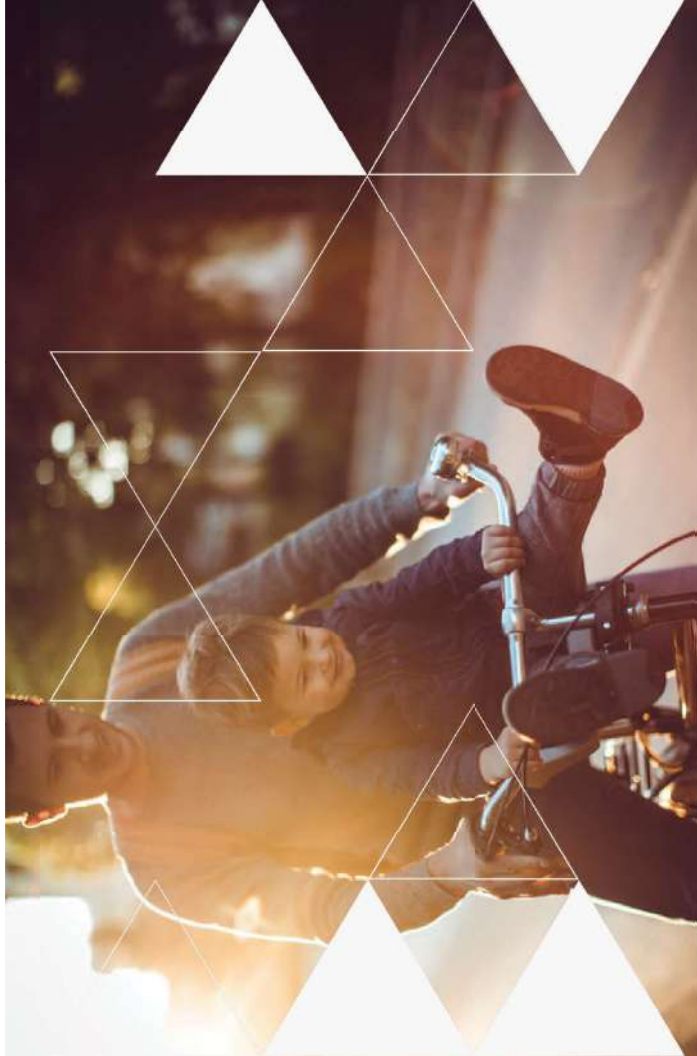

CREEPER-11%

VX SCREEN

CREEPER-11%

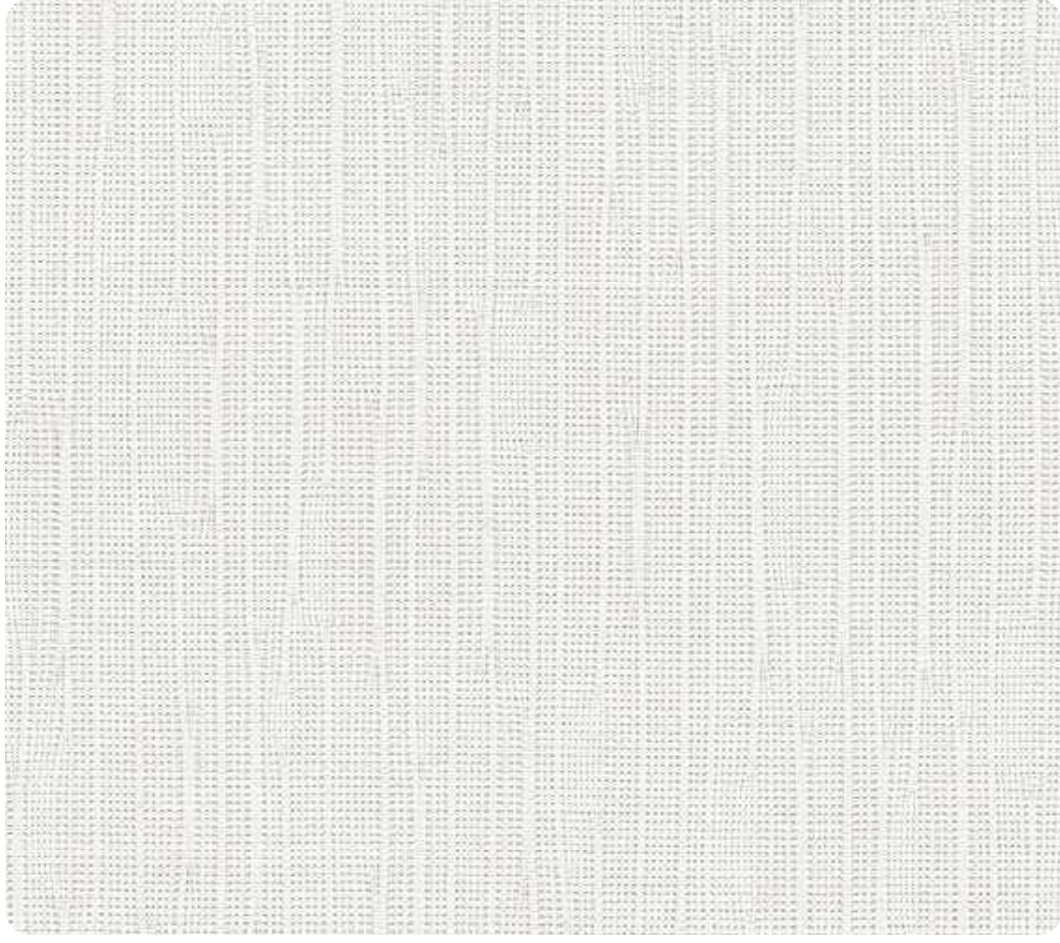

WHITE0-004-71-00298



STUCCO-8%



ASH 0-004-56-00598




STUCCO-8%
VX SCREEN

STUCCO-8%



COFFEE 0-004-56-00498

STUCCO-8%

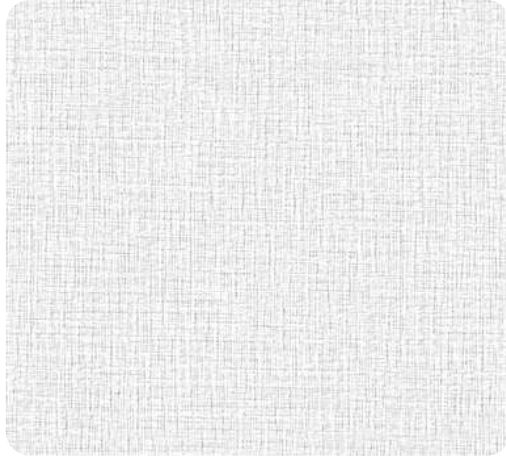


WHITE 0-004-56-00198



LINEN 0-004-56-00298



SAND 0-004-56-00398

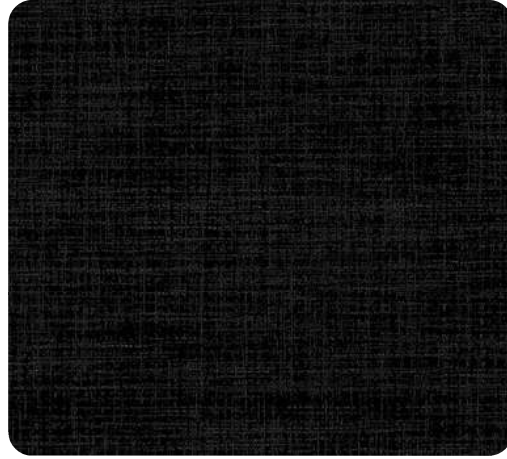


BLACK 0-004-56-00698




3000-3%
VX SCREEN

3000-3%

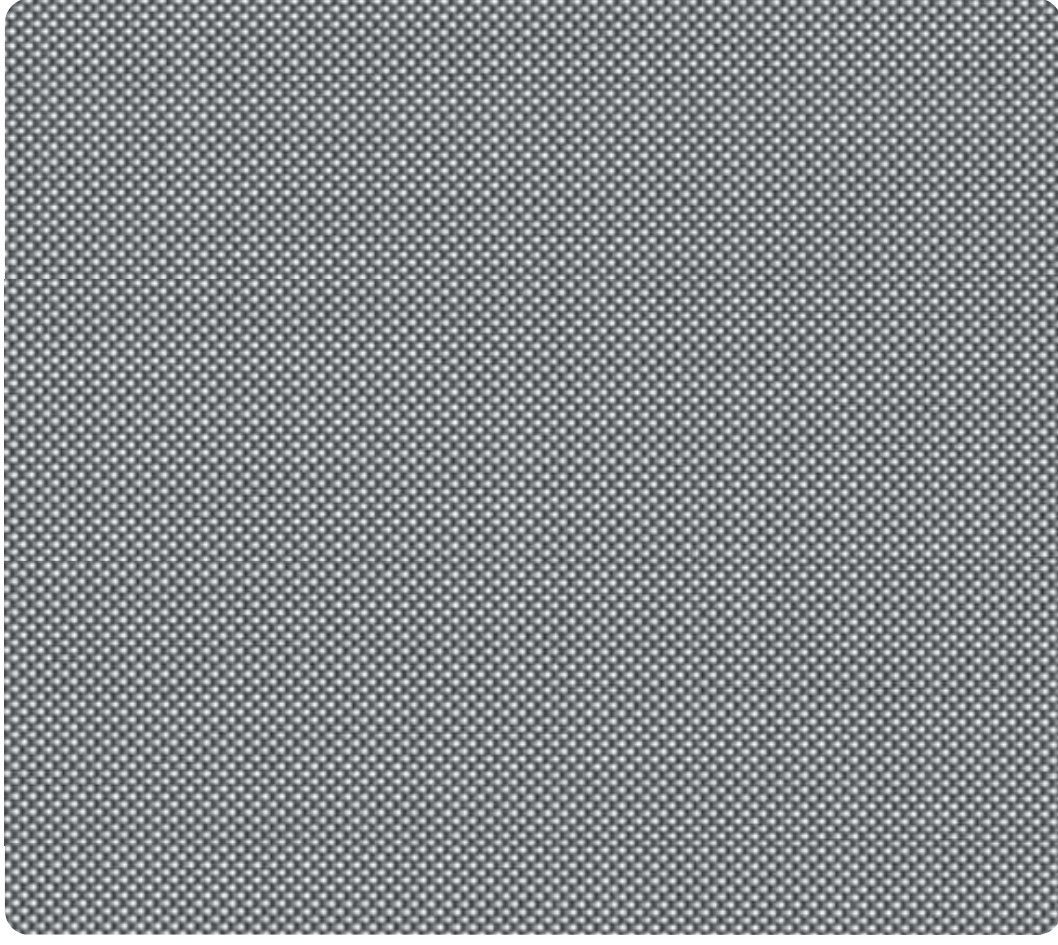


EBONY PEARL 0-004-87-20078 | 20098 | 20018

3000-3%

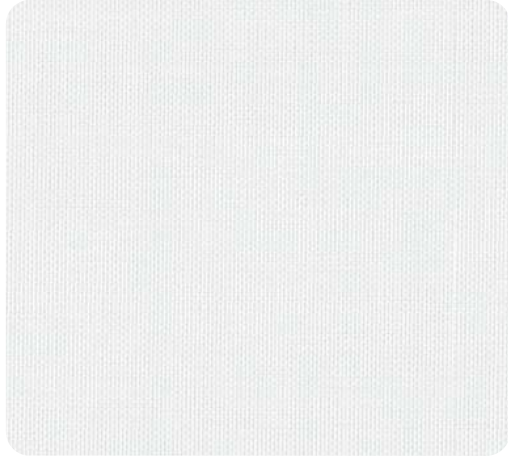


WHITE 0-004-87-00298 | 00218

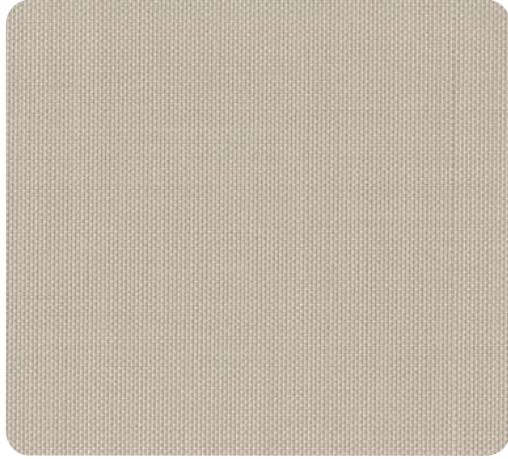

LINEN 0-004-87-00378 | 00398 | 00318


3000-3%

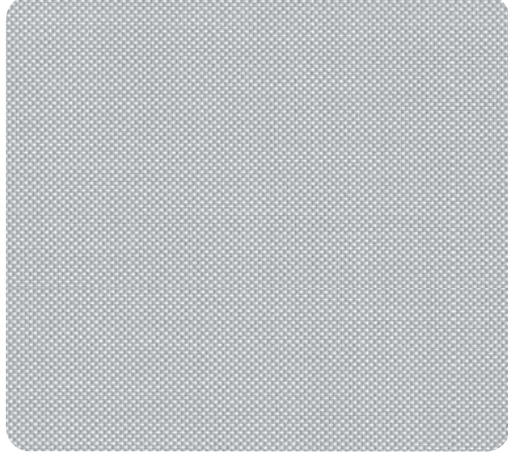


WHITE PEARL 0-004-87-02798 | 02718




BROWN CHOCOLATE 0-004-87-02598

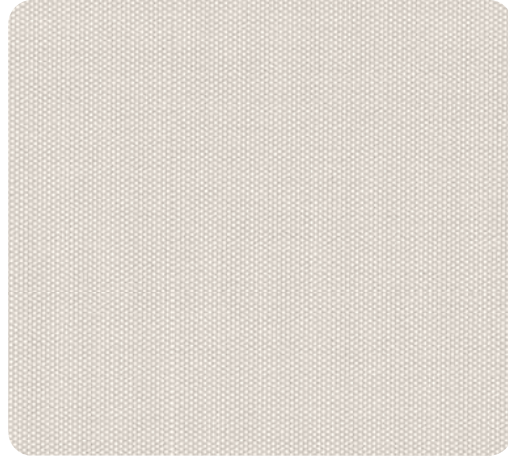


WHITE LINEN 0-004-87-22098

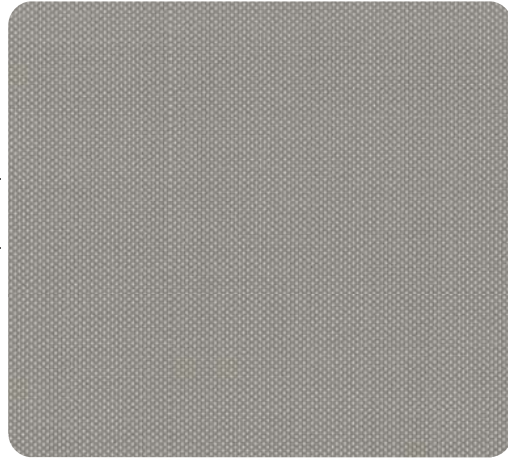

TAUPE 0-004-87-07078 | 07098 | 07018

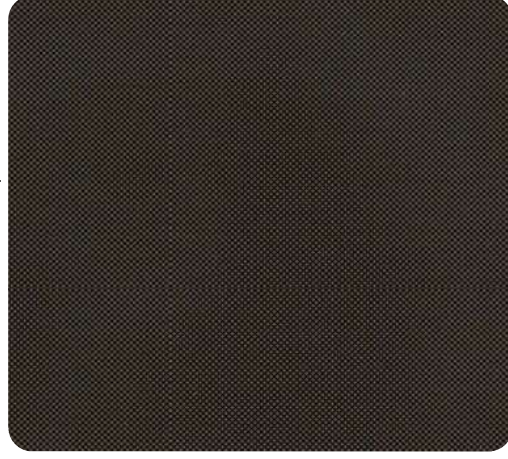

CHESTNUT 0-004-87-18378 | 18398 | 18318

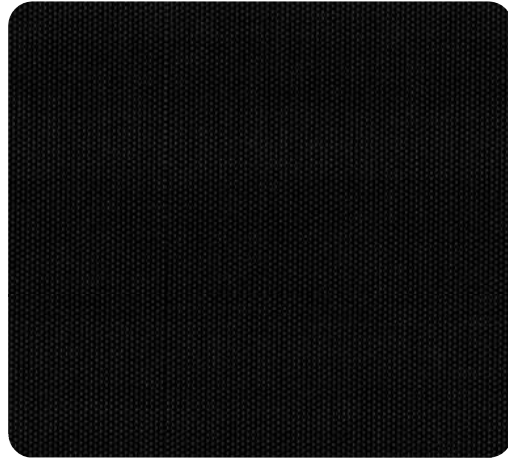


EBONY 0-004-87-01998




3000-10%
VX SCREEN

3000-10%

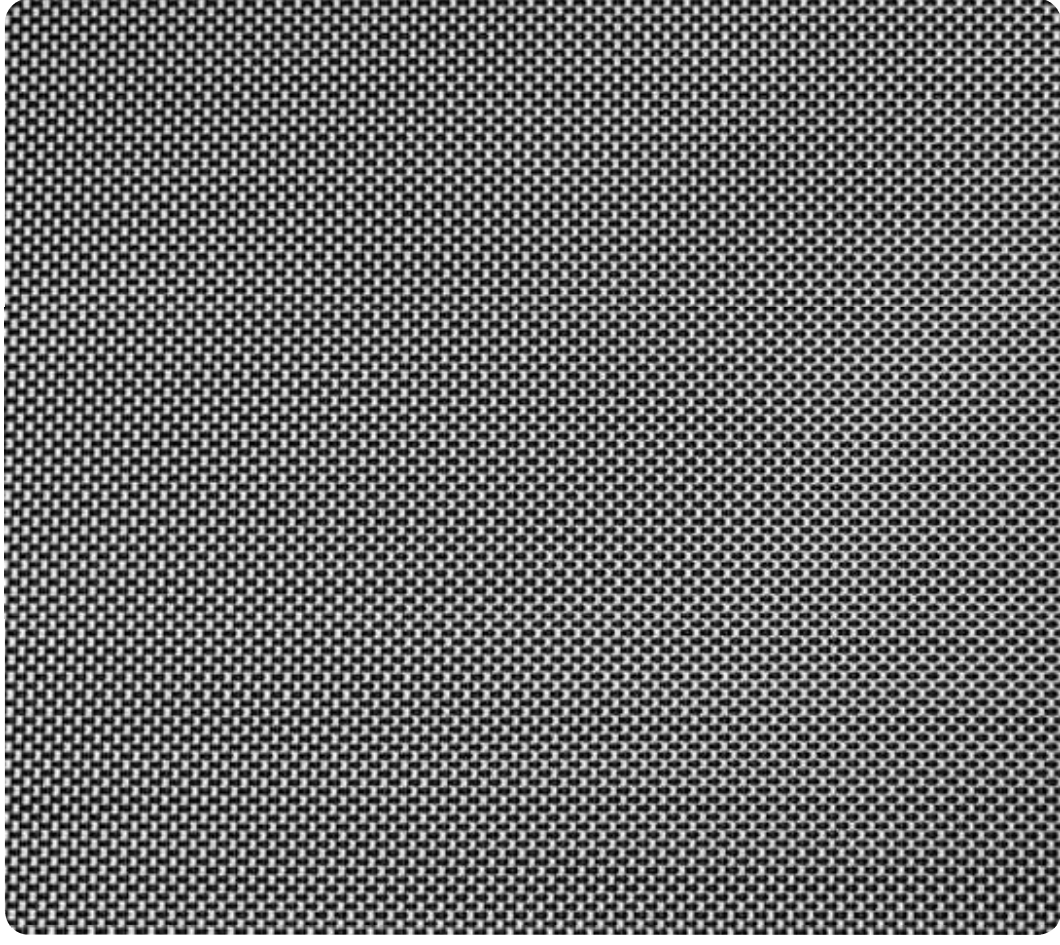


EBONY PEARL 0-004-61-20078 | 20098 | 20018

3000-10%

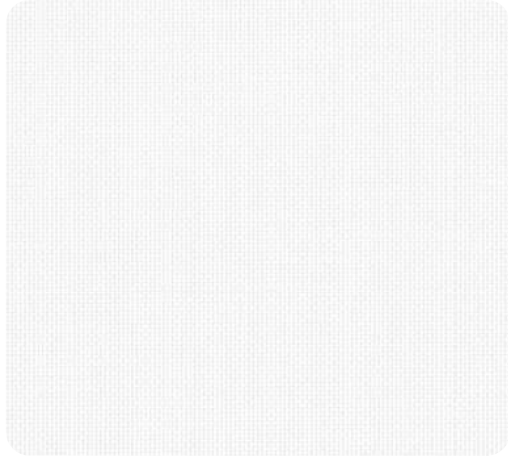


WHITE 0-004-61-00278 | 00298 | 02118

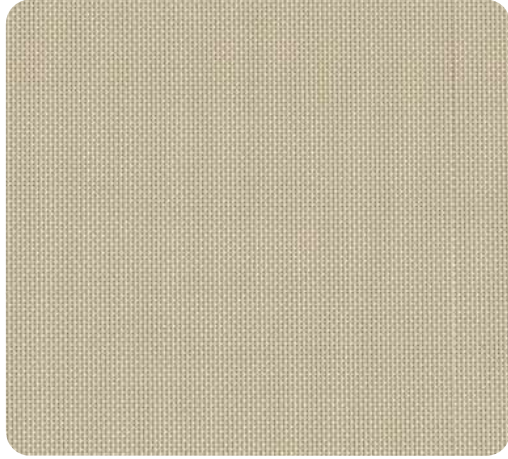

LINEN 0-004-61-00378 | 00398 | 00318


3000-10%

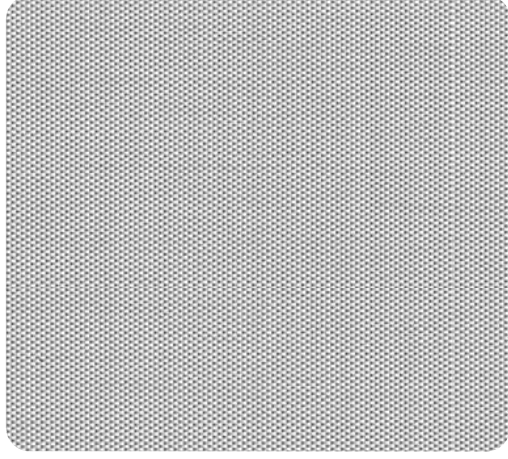


WHITE PEARL 0-004-61-02778 | 02798 | 02718




BROWN CHOCOLATE 0-004-61-02578 | 02598 | 25118

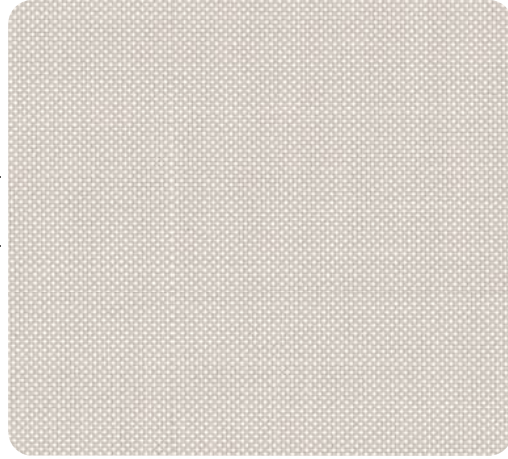


WHITE LINEN 0-004-61-22078 | 22098 | 22118

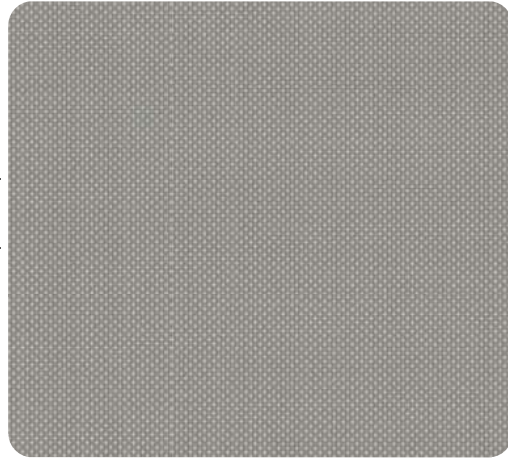

TAUPE 0-004-61-07078 | 07098 | 07018

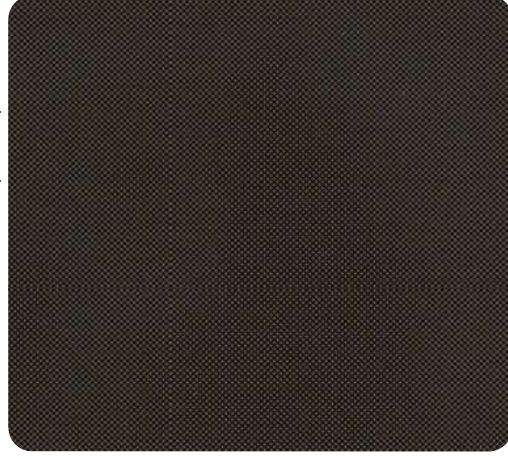

CHESTNUT 0-004-61-18378 | 18398 | 18318

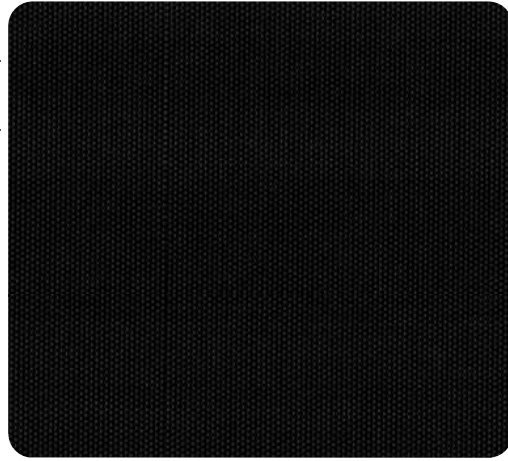


EBONY 0-004-61-01998 | 19118




3000-5%
VX SCREEN

3000-5%

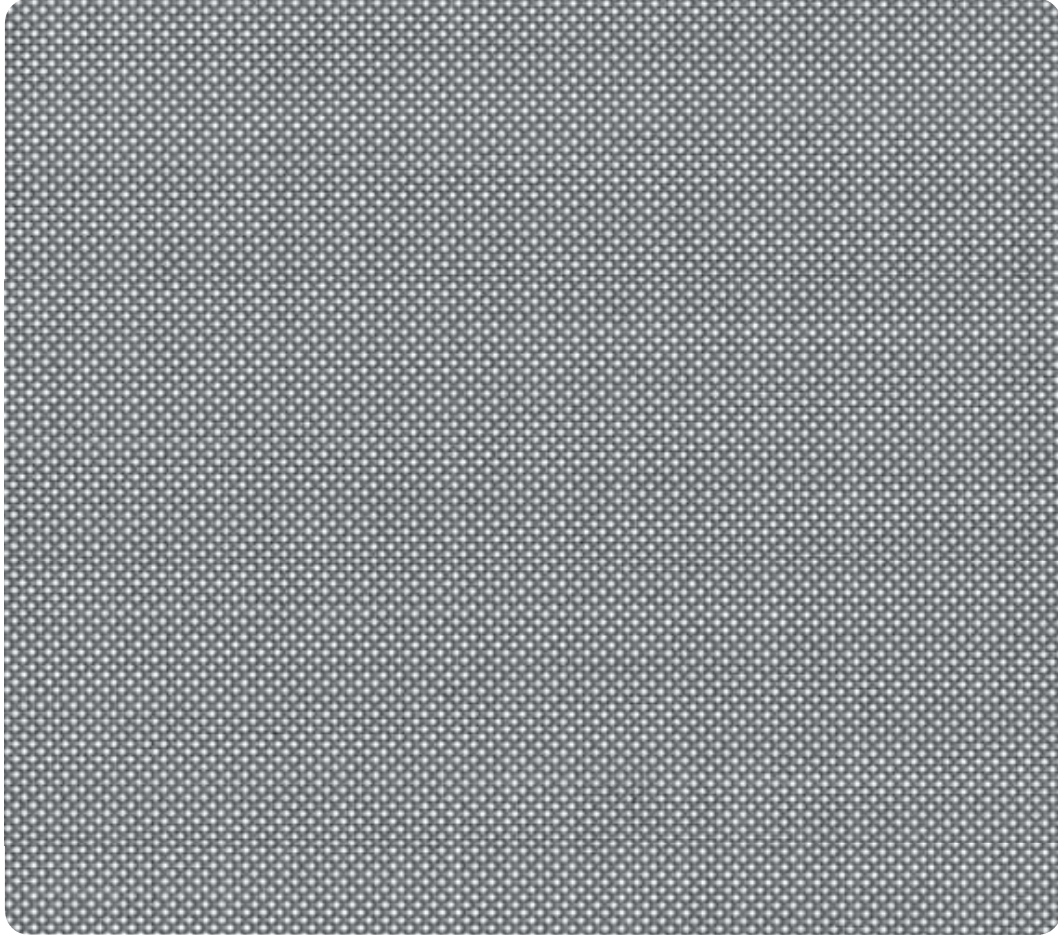


EBONY PEARL 0-004-62-20078 | 20098 | 20018

3000-5%

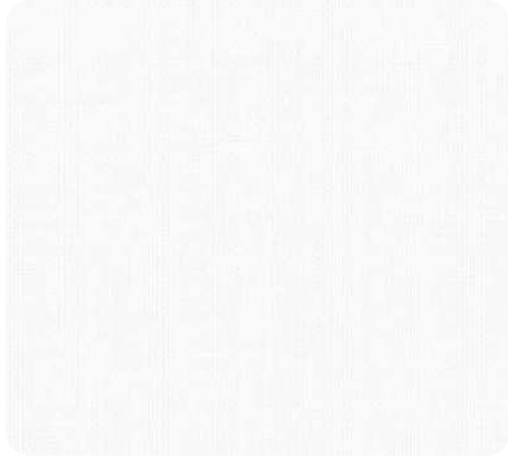


WHITE 0-004-62-00278 | 00298 | 00218

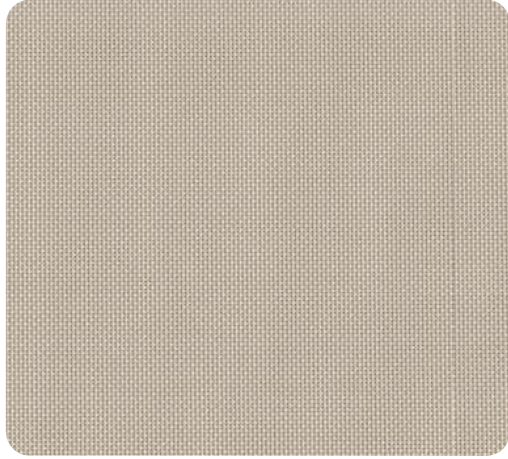

LINEN 0-004-62-00378 | 00398 | 00318


3000-5%

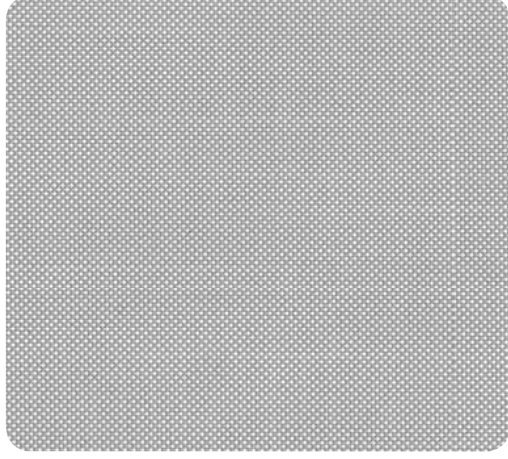


WHITE PEARL 0-004-62-02778 | 02798 | 02718




TAUPE 0-004-62-07078 | 07098 | 07018

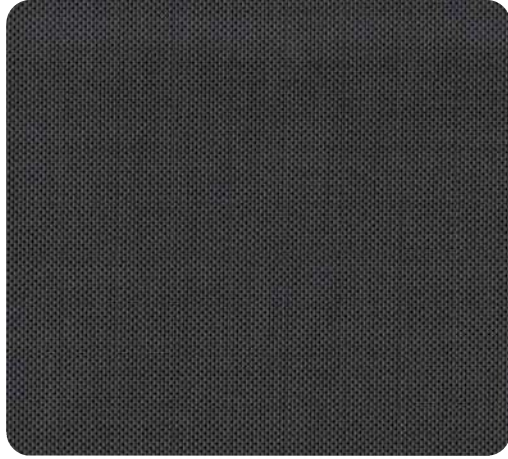


EBONY 0-004-62-01978 | 01998 | 01918

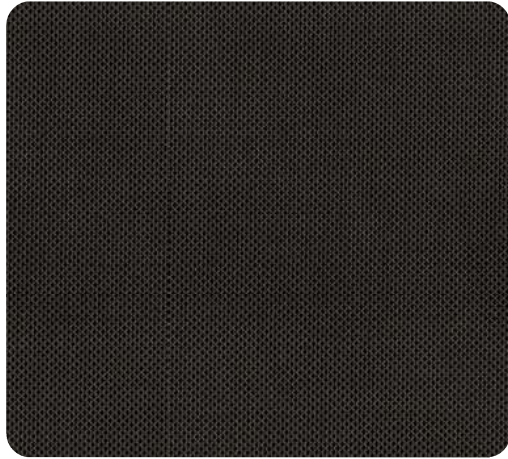

BROWN CHOCOLATE 0-004-62-02578 | 02598 | 02518

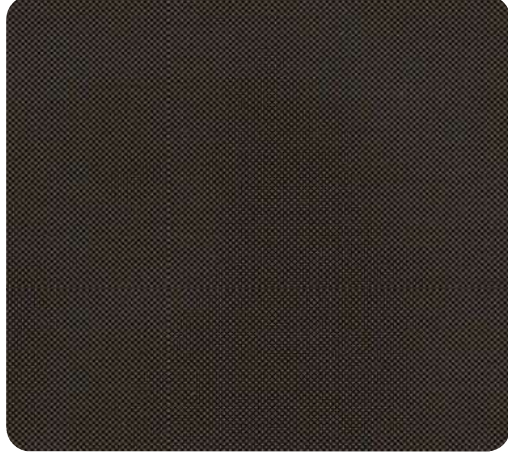


CHESTNUT 0-004-62-18378 | 18398 | 18318

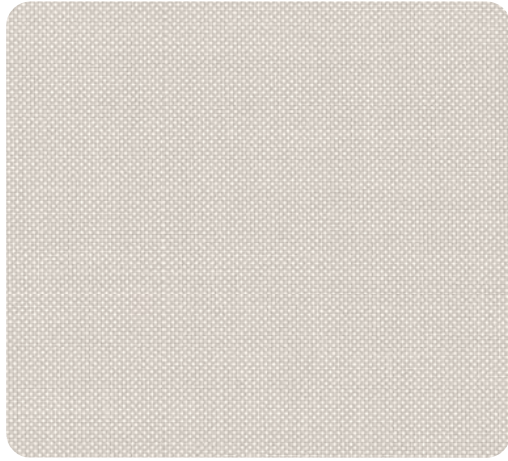

WHITE LINEN 0-004-62-22078 | 22098 | 22018



4000-5%

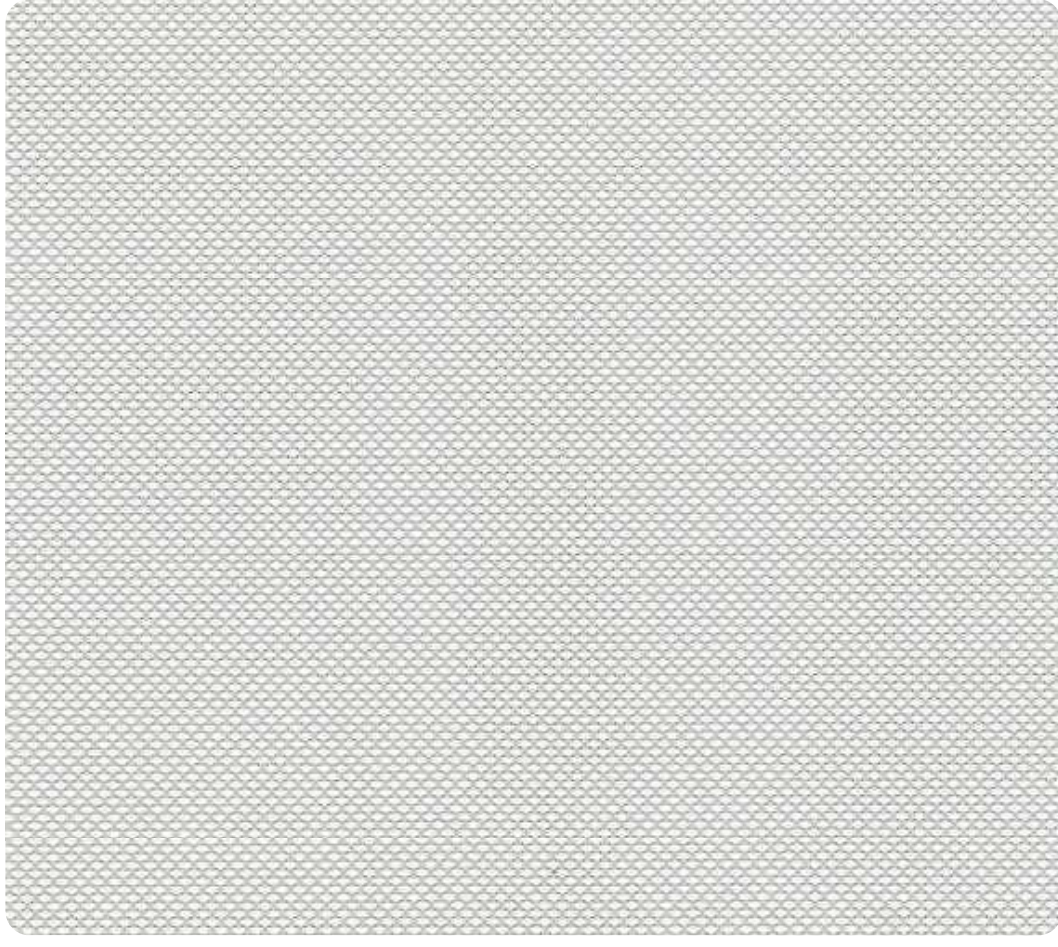


WHITE PEARL 0-004-60-02778 | 02798 | 27118



4000-5%
VX SCREEN


4000-5%

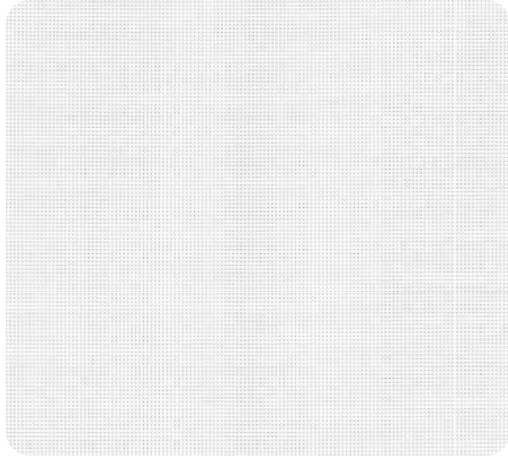


WHITE 0-004-60-00278 | 00298 | 02118



LINEN 0-004-60-00378 | 00398 | 03118

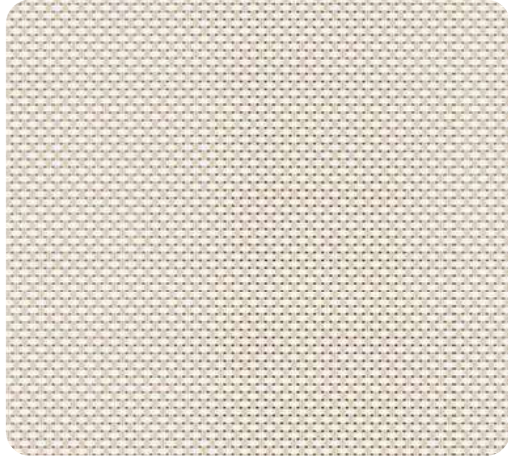

WHITE LINEN 0-004-60-22078 | 22098 | 22118

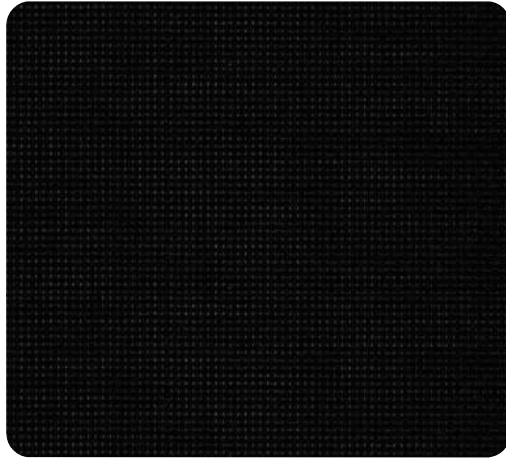


EBONY 0-004-60-01998 | 19118


4000-5%



BROWN CHOCOLATE 0-004-60-02578 | 02598 | 02518

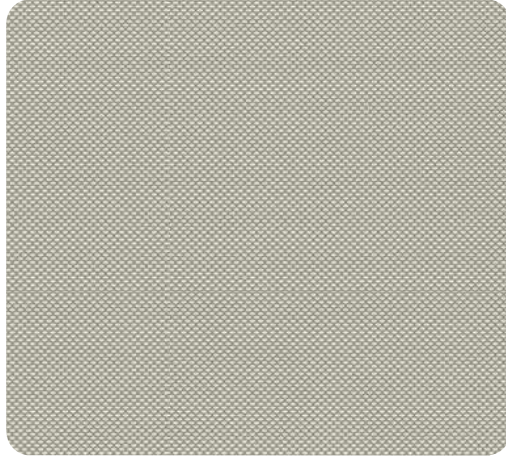


PEARL LINEN 0-004-60-72078 | 72098 | 72018

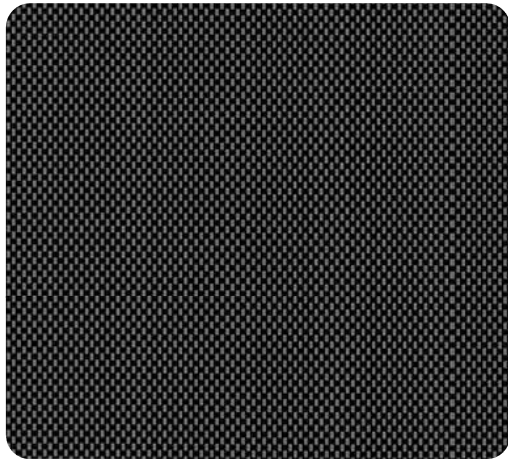

EBONY GREY 0-004-60-17078 | 17098 | 17018



8200-3%

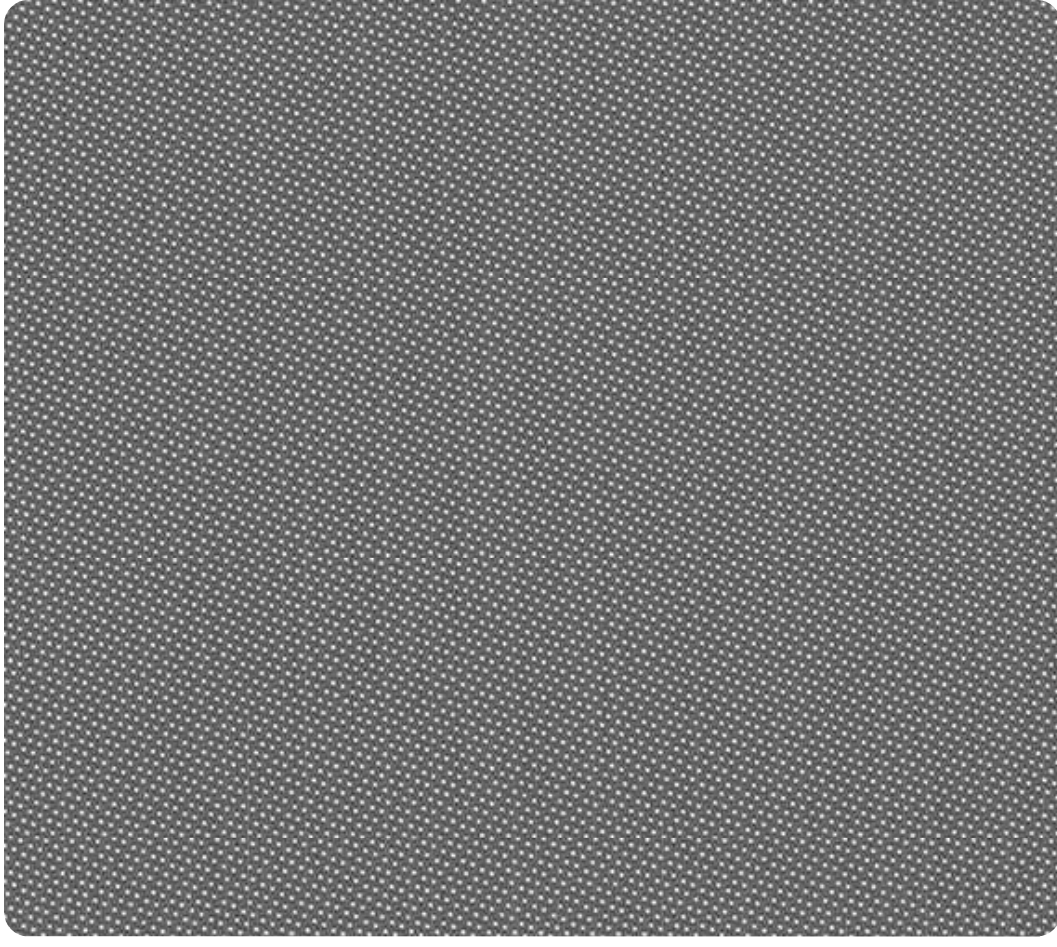

WHITE PEARL 0-004-83-02798 | 02718




8200-3%
VX SCREEN




320-20%
VX SCREEN

320-20%

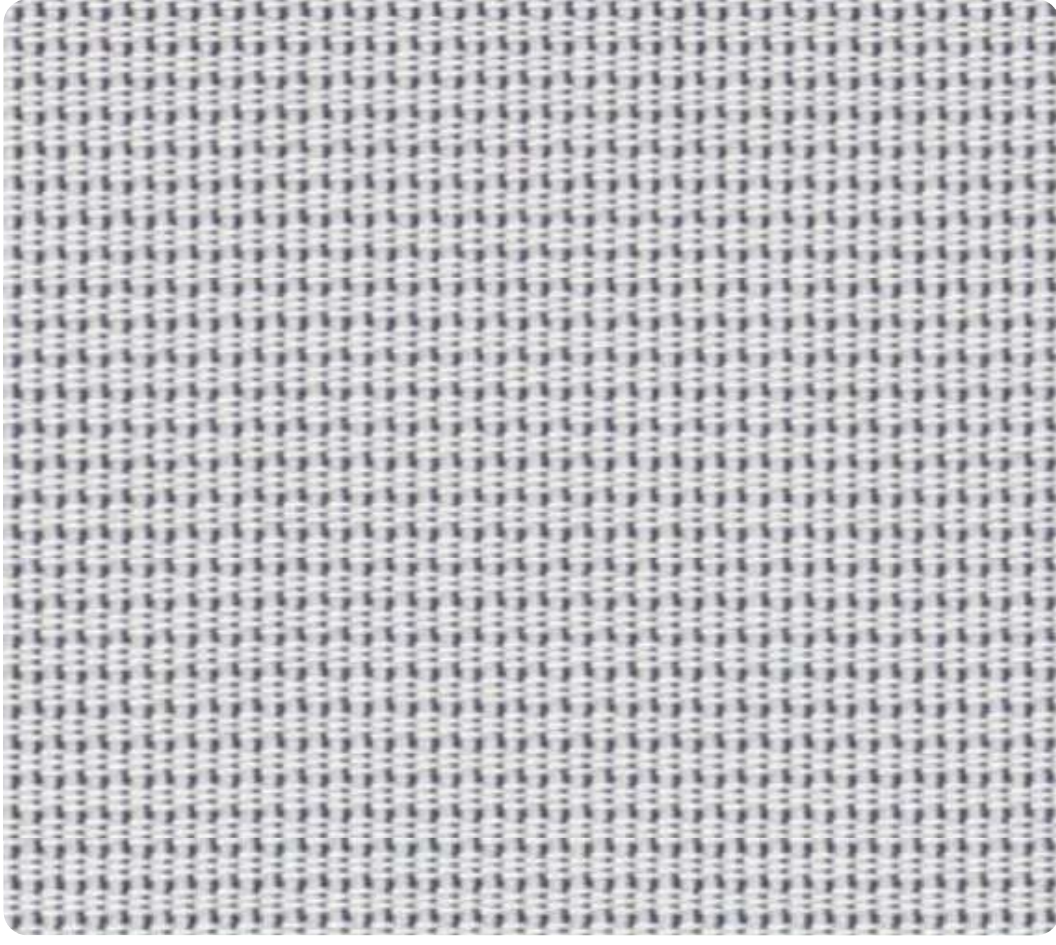


WHITE GREY0-004-66-02198


320-20%

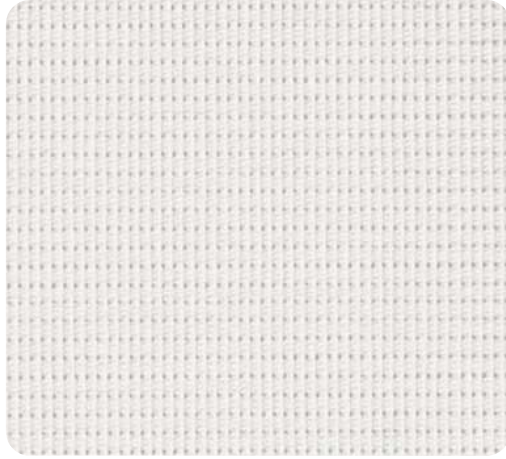


WHITE 0-004-66-00298

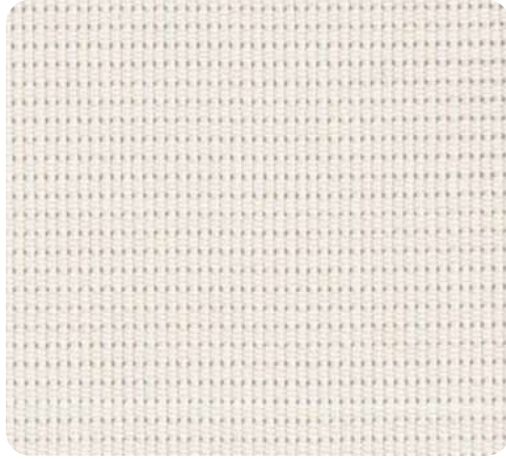

WHITE LINEN 0-004-66-22098

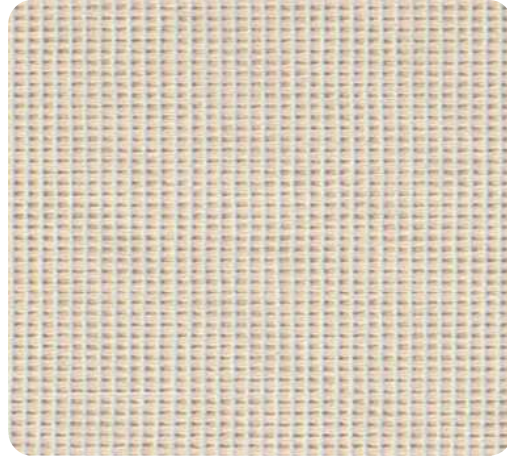


IVORY WHITE 0-004-66-00198

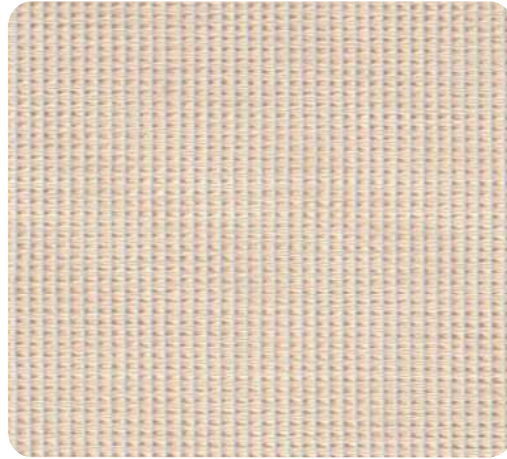

LINEN 0-004-66-00398


320-20%

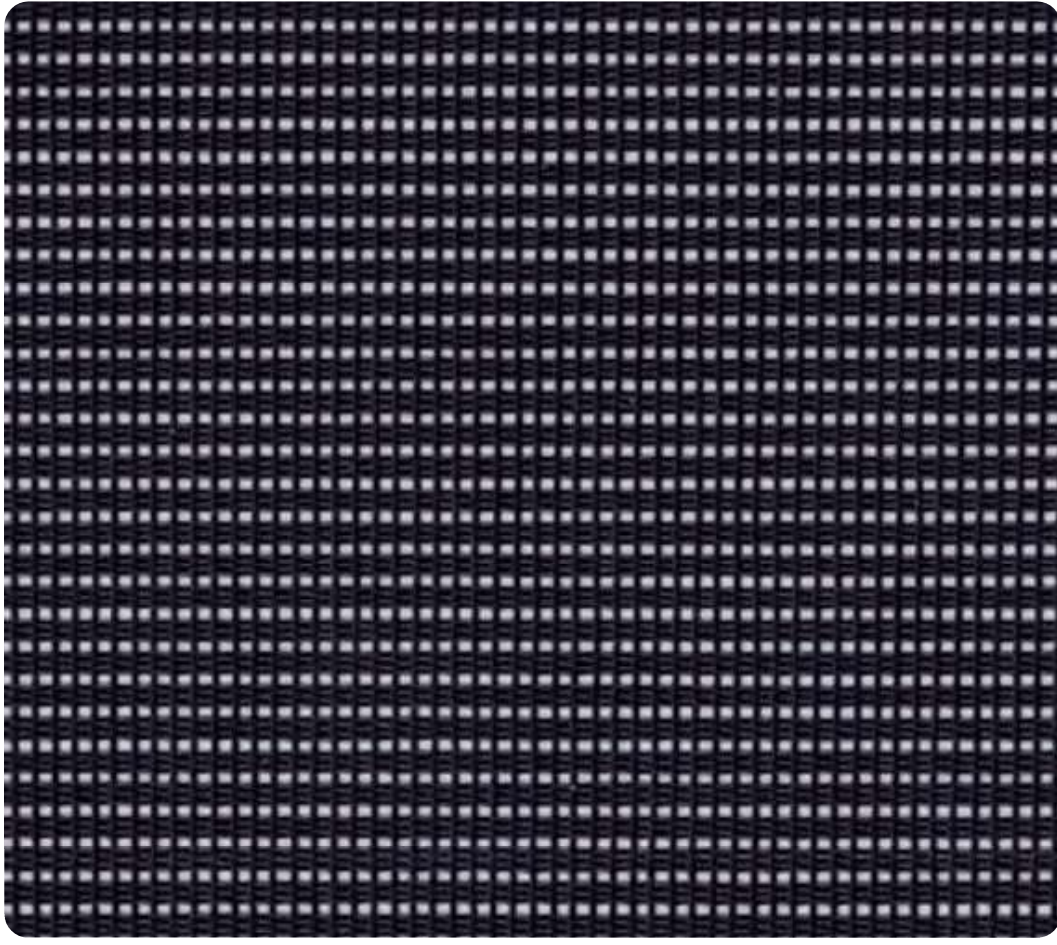

EBONY 0-004-66-01998



3000 BLACKOUT

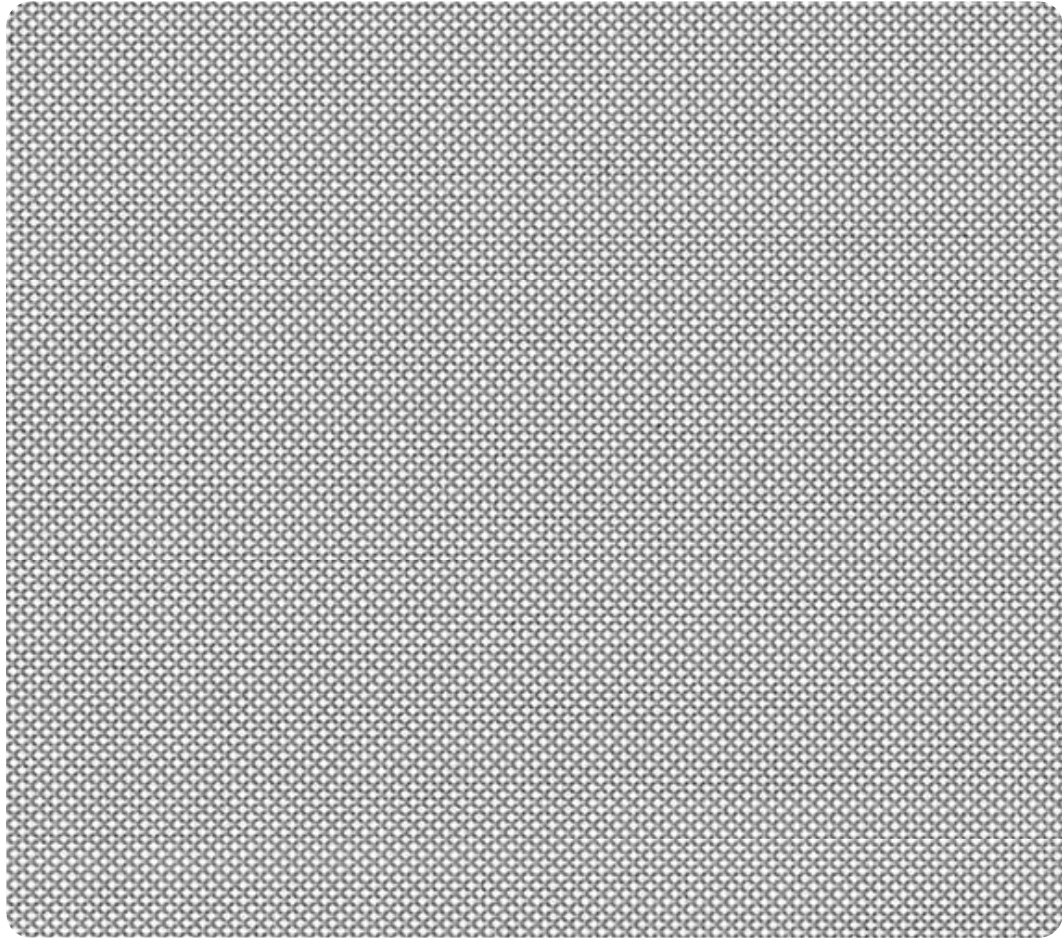


WHITE PEARL 0-004-38-27098 | 27118




3000 BLACKOUT
VX SCREEN

3000 BLACKOUT

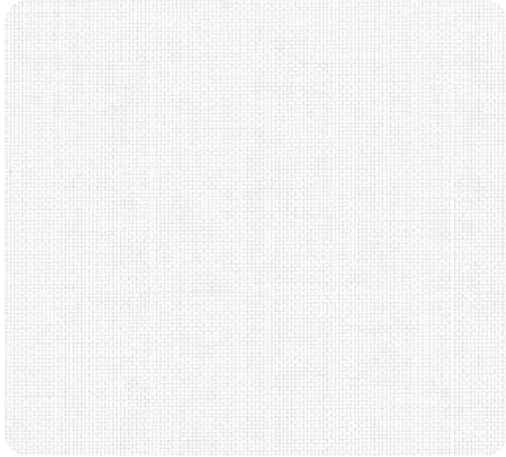

WHITEO-004-38-02098 | 02118

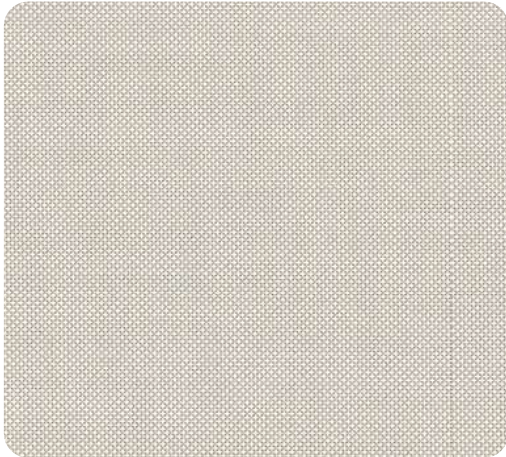

WHITE LINENO-004-38-22098 | 22118

VX SCREEN

3000 Blackout

VERTILUX

IDEAS FOR YOUR SPACE

TECHNICAL PROPERTIES

Composition	50% PVC + 22% PES + 28% Foam Backing	
Weight	580 g/m² (± 5%)	17.11 oz/yd² (± 5%)
Thickness	0.58 mm (± 5%) 0.023 in (± 5%)	
Yarn Diameter	Warp: 0.32 mm Fill: 0.32 mm	
Roll Width	2.5 m & 3.0 m 98 in & 118 in	
Roll Length	27.43 m 30 yd	
Openness Factor	0%	
UV Blockage	100%	
Mesh/in	Warp: 50 Fill: 46	
Light Fastness	Class 4 - 5	
Tensile Strength	Warp: 1380 daN/5cm (± 100) Weft: 1260 daN/5cm (± 100)	
Tearing Strength	Warp: 150 daN (± 30) Weft: 130 daN (± 30)	
Flame Retardant	NFPA 701	

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)	Tv(%)
White	00	65	35	00
White Linen	00	64	36	00
White Pearl	00	70	30	00

CARE & MAINTENANCE

- 
1. Wipe gently with a wet sponge.

2. Vacuum clean for regular maintenance.

3. Do not wash.

4. Do not wring dry.

5. Do not bleach.

6. Do not dry clean nor use steam cleaning.

M A NUFAC TURING

- 
- Use Only on Roll Direction

Ultrasonic Cut NOT Required

INTERNATIONAL CERTIFICATIONS



The Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

APPLICATIONS

- 
- Roller Shades

Sliding Panels

Indoor Use Only